


# MAGITRONICS

## A - B 4 3 2 - C

<b>Processor</b>	80486DX/80486DX2
<b>Processor Speed</b>	25/33/50(internal)/50/66(internal)MHz
<b>Chip Set</b>	OPTI
<b>Max. Onboard DRAM</b>	32MB
<b>SRAM Cache</b>	64/256KB
<b>BIOS</b>	AMI/Award
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	None

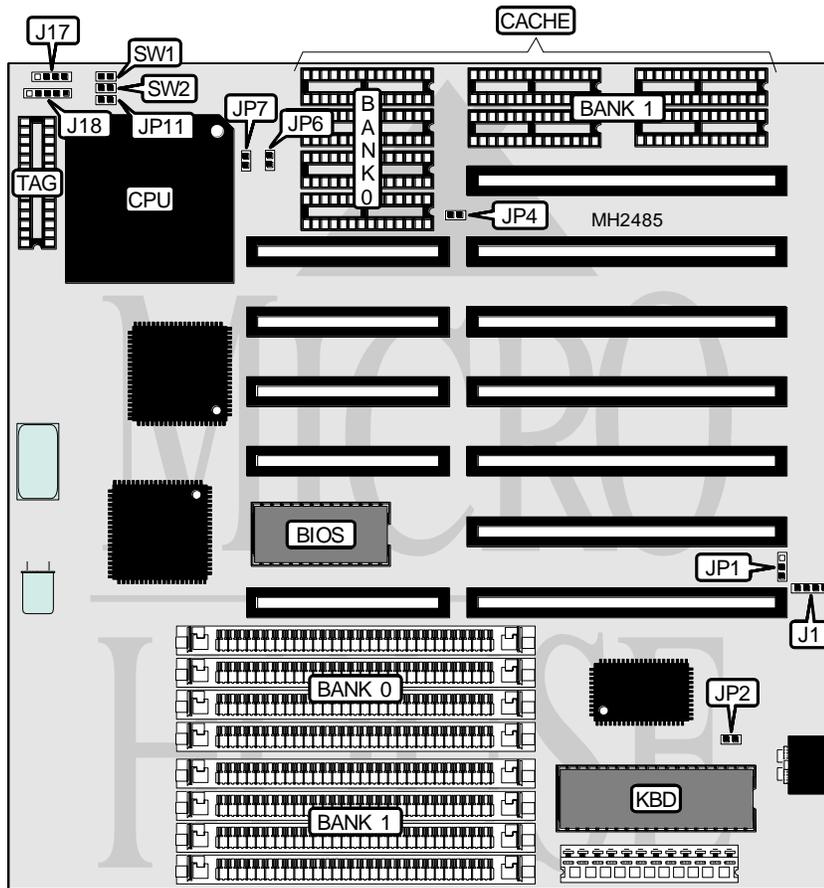

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	JP11
Speaker	J17	Reset switch	SW1
Power LED & keylock	J18	Turbo switch	SW2

Continued on next page . . .

## MAGITRONICS

## A - B 4 3 2 - C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP1	pins 2 & 3 closed
CMOS memory clear	JP1	pins 1 & 2 closed
í Monitor type select color	JP2	closed
Monitor type select monochrome	JP2	open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION			
Size	JP4	JP6	JP7
64KB	open	open	open
256KB	closed	closed	closed