


# LEADING TECHNOLOGY 6800SX

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port, VGA port
<b>NPU Options</b>	80387SX

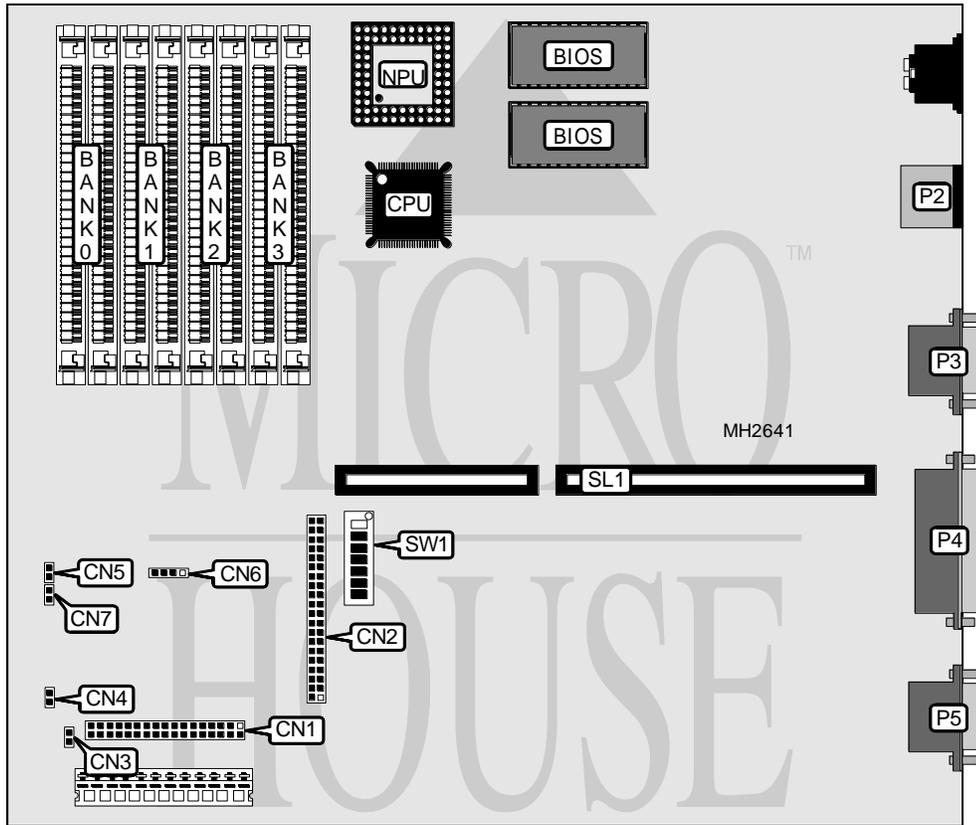

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy drive interface	CN1	Reset switch	CN7
IDE interface	CN2	PS/2 mouse port	P2
Power LED	CN3	Serial port	P3
External battery	CN4	Parallel port	P4
Turbo switch	CN5	VGA port	P5
IDE interface LED	CN6	Riser Card	SL1

Continued on next page. . .

## LEADING TECHNOLOGY

### 6800SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Write buffer disabled	SW1/4	Off
Write buffer enabled	SW1/4	On
í Bit mode select 8-bit mode	SW1/5	Off
Bit mode select 16-bit mode	SW1/5	On
í Video mode switching select PC/AT	SW1/6	Off
Video mode switching select PS/2	SW1/6	On
í Video type select PS/2 compatible	SW1/7	Off
Video type select oldeer multi frequency	SW1/7	On

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			
8MB	(2) 4M x 9	NONE	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE

VIDEO CONFIGURATION			
Setting	SW1/1	SW1/2	SW1/3
On board VGA enabled	On	On	Off
On board VGA disabled	Off	Off	On