


**PROCOMP USA, INC.
PBT-445C VLB**

Q3/96

Data bus: 32-bit VL Bus
 Size: Three-quarter length, half-height card
 Hard drive supported: Up to seven Fast SCSI-2 devices
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

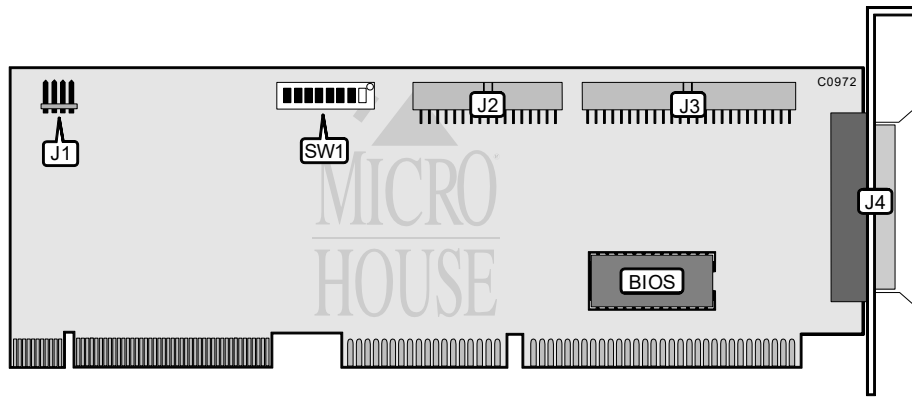

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	J1
34-pin cable connector - floppy drive	J2
50-pin SCSI connector - internal	J3
50-pin SCSI connector - external	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Local bus clock speed is >33 MHz	SW1/4	On
Local bus clock speed is <=33 MHz	SW1/4	Off
f Floppy drive interface enabled	SW1/8	On
Floppy drive interface disabled	SW1/8	Off

Continued on next page. . .

**PROCOMP USA, INC.
PBT-445C VLB**

...continued from previous page

BIOS ADDRESS SELECTION			
Address	SW1/5	SW1/6	SW1/7
C8000h	Off	On	Off
CC000h	On	On	Off
D0000h	Off	Off	On
D4000h	On	Off	On
D8000h	Off	On	On
i DC000h	On	On	On
Disabled	N/A	Off	Off

BASE I/O ADDRESS SELECTION			
Address	SW1/1	SW1/2	SW1/3
130h	On	On	Off
134h	Off	On	Off
230h	On	Off	On
234h	Off	Off	On
i 330h	On	On	On
334h	Off	On	On