


# PERCEPTIVE SOLUTIONS, INC. PATHFINDER PSI-2500

Q3/96

Data bus: 32-bit VL bus  
 Size: Three-quarter length, full-height card  
 Hard drive supported: Up to seven Fast SCSI-2 devices  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

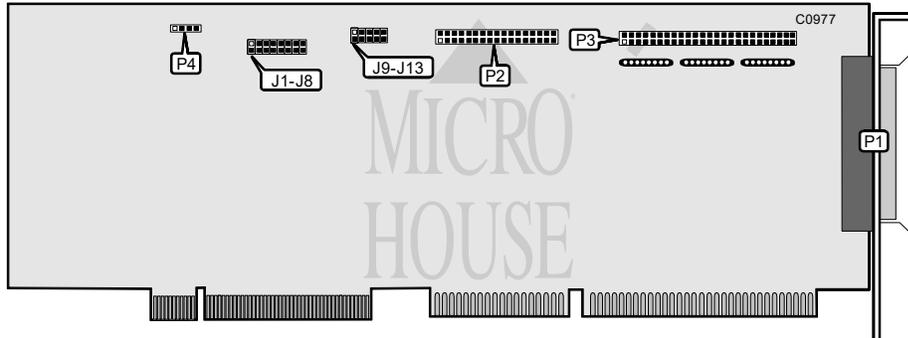

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	P1
34-pin cable connector - floppy drive	P2
50-pin SCSI connector - internal	P3
4-pin connector - drive active LED	P4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Synchronous Negotiation disabled	J3	Closed
Synchronous Negotiation enabled	J3	Open
† Factory configured - do not alter	J4	Closed
† Floppy drive controller is primary	J13	Open
Floppy drive controller is secondary	J13	Closed

BIOS ADDRESS SELECTION		
Address	J5	J6
C8000-CEFFFh	Closed	Open
D0000-D7FFFh	Open	Closed
D8000-DFFFFh	Open	Open

Continued on next page. . .

PERCEPTIVE SOLUTIONS, INC.  
 PATHFINDER PSI-2500

...continued from previous page

INTERRUPT SELECTION						
INT	J7	J8	J9	J10	J11	J12
10	Open	Closed	Open	Closed	Open	Open
11	Closed	Open	Open	Open	Closed	Open
12	Open	Open	Closed	Open	Open	Open
14	Closed	Closed	Open	Open	Open	Closed

HARD DISK FORMAT SELECTION		
Layout	J1	J2
64 Heads/32 Sectors (Adaptec compatible)	Closed	Closed
255 Heads/63 Sectors (8 GB)	Open	Open