


PROCOMP USA, INC.

PM-171 (PRO-MASTER)

Data Bus
 Card Size
 Hard Drives supported
 Floppy drives supported

32-bit EISA
 Full-height, Half-length
 Up to 7 SCSI-2 devices
 Two 360KB, 720KB, 1.2MB, or 1.44MB drives

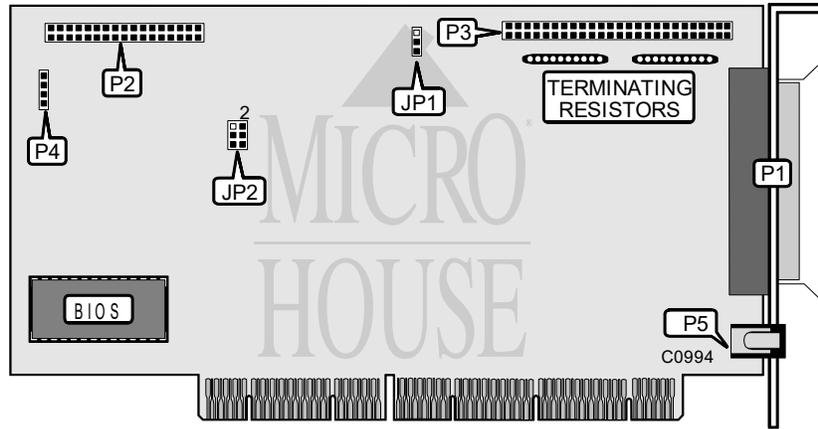

CONNECTIONS			
Function	Location	Function	Location
50-pin SCSI connector - external	P1	4-pin connector - drive active LED	P4
34-pin cable connector - floppy drive	P2	UPS jack (only on some models)	P5
50-pin SCSI connector - internal	P3		

FLOPPY CONTROLLER CONFIGURATION			
Setting	JP2/Pins 1 & 2	JP2/Pins 3 & 4	JP2/Pins 5 & 6
í Enabled by hardware	Closed	Open	Open
Configured by EISA configuration utility	Open	Closed	Open
Disabled by hardware	Open	Open	Closed

USER CONFIGURABLE SETTINGS	
Setting	JP1
í Termpower supplied by adapter to SCSI bus enabled	Pins 1 & 2 closed
Termpower supplied by adapter to SCSI bus disabled	Pins 2 & 3 closed
Notes: On the board, JP1/pins 1 & 2 correspond to the "ON" to center-pin" position; JP1/pins 2 & 3 correspond to the "center-pin to 'OFF'" position.	