


# UNIDENTIFIED TURBO MAIN BOARD

<b>Processor</b>	8088
<b>Processor Speed</b>	8MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	640KB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

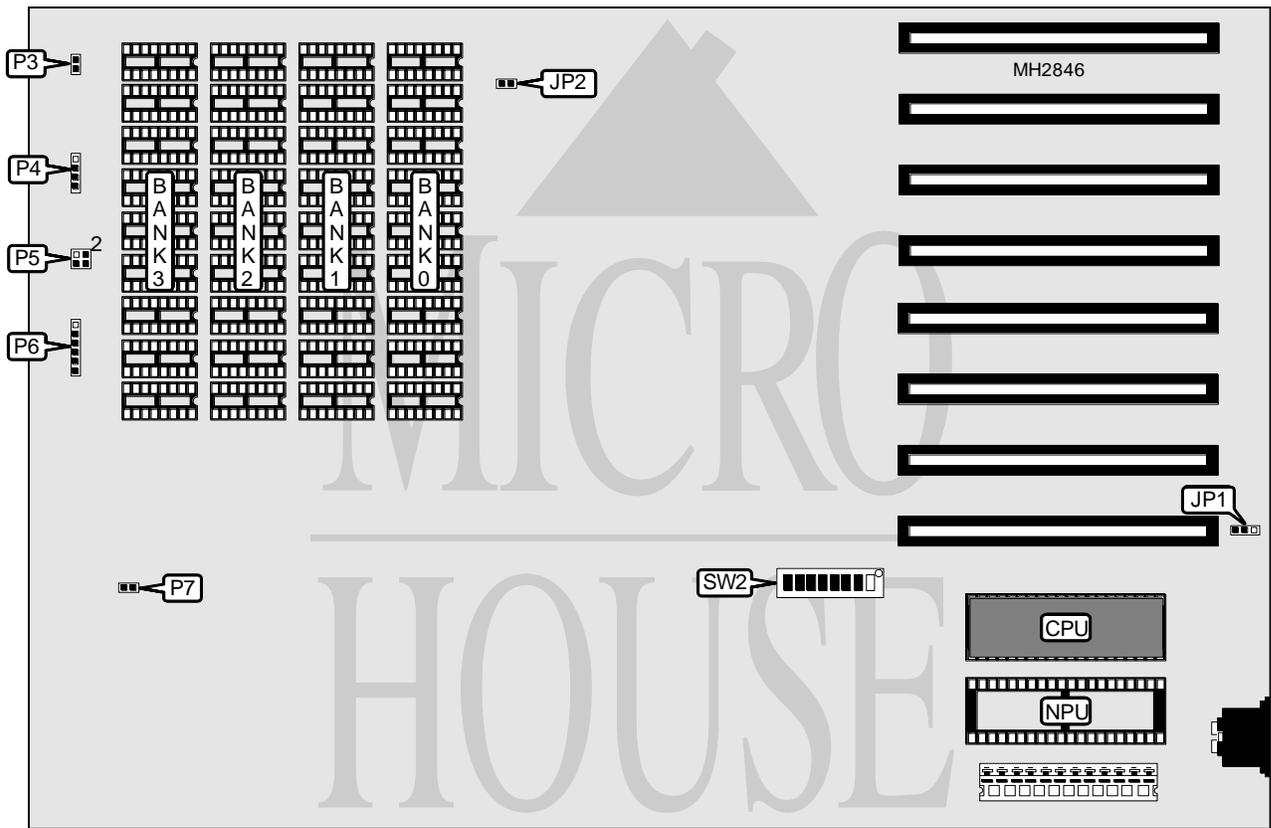

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	JP1	Turbo LED	P6 pins 1 & 2
Turbo LED	P3	Reset switch	P6 pins
Speaker	P4	Keylock	P6 pins
Turbo switch	P5	Turbo LED	P7

Continued on next page. . .

# UNIDENTIFIED TURBO MAIN BOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Turbo enabled	P5	pins 1 & 2 closed
Turbo disabled	P5	pins 3 & 4 closed
í Turbo enabled	SW2/1	Off
Turbo disabled	SW2/1	On
í NPU disabled	SW2/2	On
NPU enabled	SW2/2	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64KB	(9) 4164	NONE	NONE	NONE
128KB	(9) 4164	(9) 4164	NONE	NONE
192KB	(9) 4164	(9) 4164	(9) 4164	NONE
256KB	(9) 4164	(9) 4164	(9) 4164	(9) 4164
256KB	(9) 41256	NONE	NONE	NONE
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164

DRAM SWITCH CONFIGURATION		
Size	SW2/3	SW2/4
64KB	On	On
128KB	Off	On
192KB	Off	On
256KB	Off	Off
640KB	Off	Off

DRAM SWITCH CONFIGURATION	
Size	JP2
Bank 0 & 1 = 41256	Closed
Bank 2 & 3 = 4164	Closed

DRAM SWITCH CONFIGURATION	
Size	JP2
Bank 0 & 1 = 4164	Open
Bank 2 & 3 = 4164	Open

MONITOR CONFIGURATION		
Type	SW2/5	SW2/6
Monochrome	Off	Off
40 x 25 color	Off	On
80 x 25 color	On	Off

FLOPPY DRIVE CONFIGURATION		
Type	SW2/7	SW2/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off

