


RELIALOGIC CORPORATION PRIVATE, LTD. CA9332

Data Bus 16-bit ISA
Card Size Full height, half length
Hard Drives Supported Two IDE(XT/AT) devices
Floppy Drives Supported Unidentified

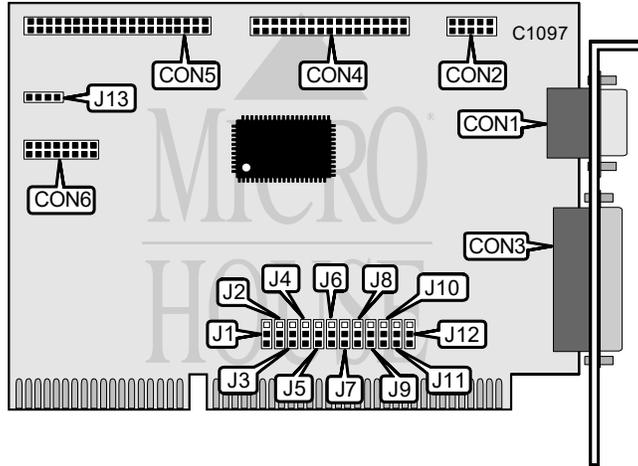

CONNECTIONS			
Function	Label	Function	Label
9-pin serial port 1 - external	CON1	40-pin IDE(AT) connector	CON5
10-pin serial port 2 - internal	CON2	16-pin game port	CON6
25-pin parallel port - external	CON3	4-pin drive active LED	J13
34-pin cable connector - floppy drive	CON4		

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Floppy drive interface enabled	J1	Pins 1 & 2 closed
Floppy drive interface disabled	J1	Pins 2 & 3 closed
í Floppy address is 3F0h	J2	Pins 1 & 2 closed
Floppy address is 370h	J2	Pins 2 & 3 closed
í IDE(AT) interface enabled	J3	Pins 1 & 2 closed
IDE(AT) interface disabled	J3	Pins 2 & 3 closed
í IDE(AT) address is 1F0h	J4	Pins 1 & 2 closed
IDE(AT) address is 170h	J4	Pins 2 & 3 closed
í IDE(XT) address is 320h	J5	Pins 1 & 2 closed
IDE(XT) address is 324h	J5	Pins 2 & 3 closed
í IDE connector is IDE(AT)	J6	Pins 1 & 2 closed
IDE connector is IDE(XT)	J6	Pins 2 & 3 closed
í Serial port 1 enabled	J7	Pins 1 & 2 closed
Serial port 1 disabled	J7	Pins 2 & 3 closed
í Serial port 1 address is 3F8h (COM1:)	J8	Pins 1 & 2 closed
Serial port 1 address is 3E8h (COM3:)	J8	Pins 2 & 3 closed

Continued on next page. . .

RELIALOGIC CORPORATION PRIVATE, LTD.
CA9332

. . . continued from previous page

USER CONFIGURABLE SETTINGS (CON'T)		
Setting	Label	Position
í Serial port 2 enabled	J9	Pins 1 & 2 closed
Serial port 2 disabled	J9	Pins 2 & 3 closed
í Serial port 2 address is 2F8h (COM2:)	J10	Pins 1 & 2 closed
Serial port 2 address is 2E8h (COM4:)	J10	Pins 2 & 3 closed
í Parallel port enabled	J11	Pins 1 & 2 closed
Parallel port disabled	J11	Pins 2 & 3 closed
í Parallel port address is 378h	J12	Pins 1 & 2 closed
Parallel port address is 278h	J12	Pins 2 & 3 closed