


UNIDENTIFIED GW2760EX SUPER I/O CARD

Chipset Unidentified
Data Bus 16-bit ISA
Card Size Full height, half length
Hard Drives Supported Two IDE(AT) devices
Floppy Drives Supported Two 360KB, 720KB, 1.2MB, or 1.44MB drives

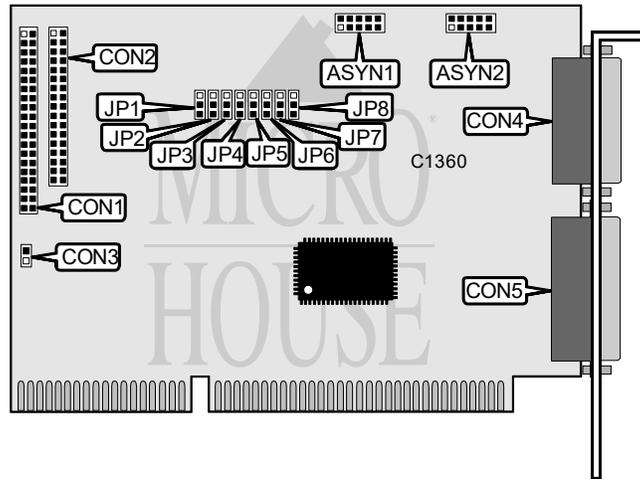

CONNECTIONS			
Function	Label	Function	Label
10-pin serial port 1 - internal	ASYN1	2-pin drive active LED	CON3
10-pin serial port 2 - internal	ASYN2	15-pin game port	CON4
40-pin IDE(AT) connector	CON1	25-pin parallel port - external	CON5
34-pin cable connector - floppy drive	CON2		

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Game port enabled	JP1	Pins 1 & 2 closed
Game port disabled	JP1	Pins 2 & 3 closed
Factory configured - do not alter	JP2	Pins 1 & 2 closed
Floppy interface enabled	JP3	Pins 1 & 2 closed
Floppy interface disabled	JP3	Pins 2 & 3 closed

SERIAL PORT ADDRESS SELECTION				
Port 1	Port 2	JP3	JP4	JP5
3F8h (COM1:)	2F8h (COM2:)	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
3F8h (COM1:)	Disabled	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
2F8h (COM2:)	3F8h (COM1:)	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
2F8h (COM2:)	Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	3F8h (COM1:)	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
Disabled	2F8h (COM2:)	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
Disabled	Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed

Continued on next page. . .

UNIDENTIFIED GW2760EX SUPER I/O CARD

. . . continued from previous page

PARALLEL PORT ADDRESS SELECTION		
Setting	JP7	JP8
LPT1:	Pins 1 & 2 closed	Pins 2 & 3 closed
LPT2:	Pins 1 & 2 closed	Pins 1 & 2 closed
LPT3:	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed