


# UNIDENTIFIED TURBO 286

<b>Processor</b>	80286
<b>Processor Speed</b>	6/10/12MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	383mm x 328mm
<b>I/O Options</b>	None
<b>NPU Options</b>	None

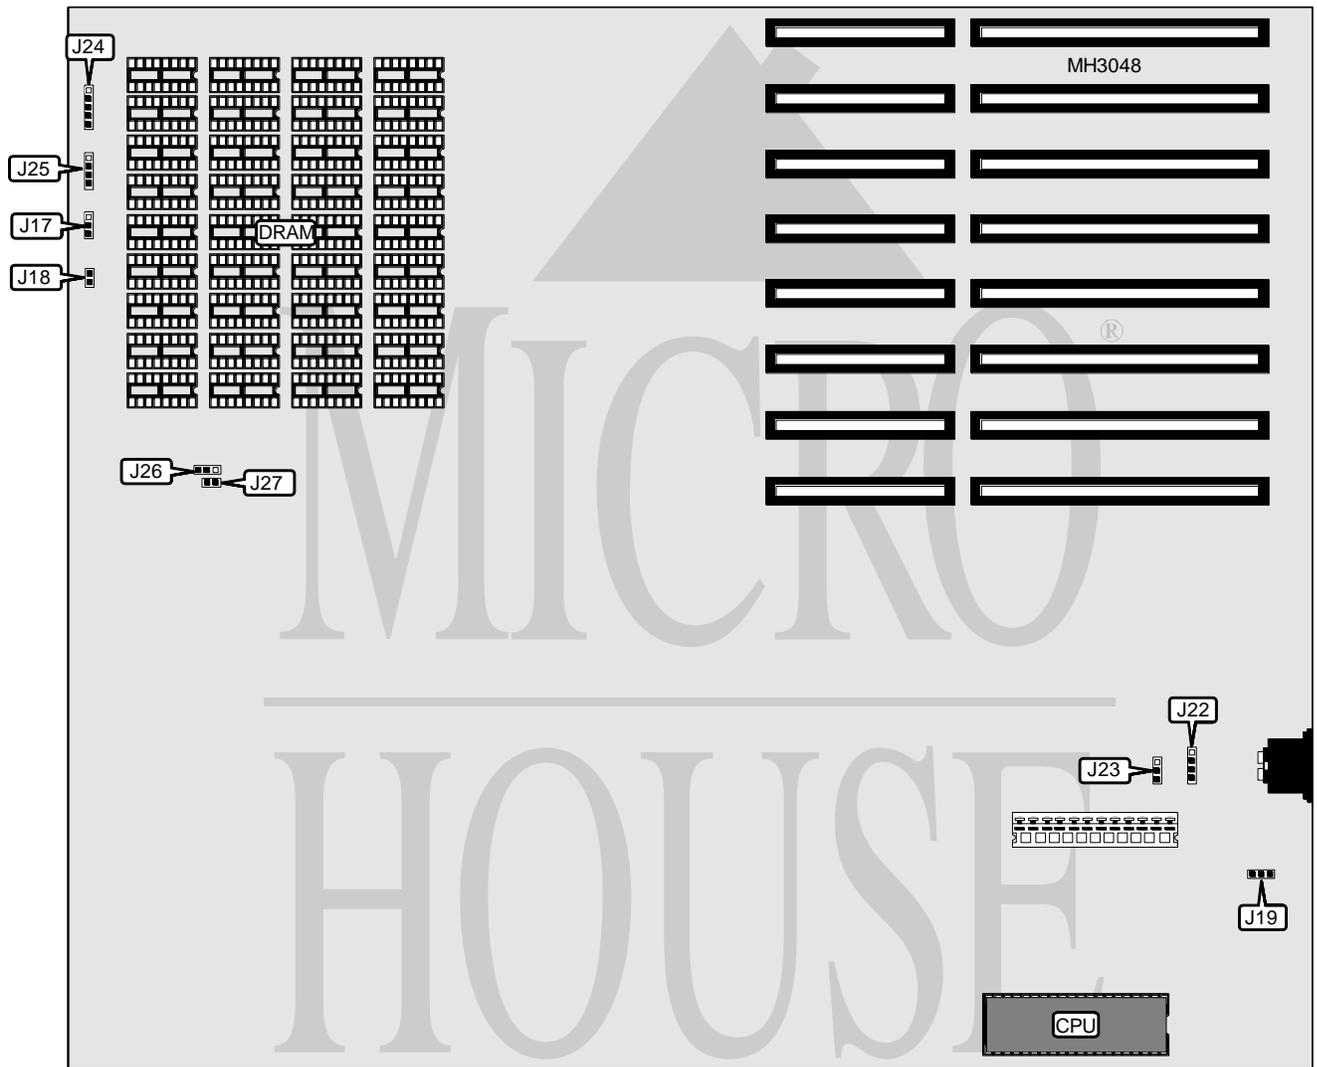

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J18	Power LED & keylock	J24
External battery	J22	Speaker	J25

Continued on next page. . .

# UNIDENTIFIED TURBO 286

... continued from previous page

## USER CONFIGURABLE SETTINGS

Function	Jumper	Position
Monitor type select color	J23	pins 2 & 3 closed
Monitor type select monochrome	J23	pins 1 & 2 closed

## DRAM CONFIGURATION

Size	Bank 0	Bank 1
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256

Note: The exact location of Bank 0 and Bank 1 are unidentified.

## DRAM JUMPER CONFIGURATION

Size	J26
640KB	pins 1 & 2 closed
1MB	pins 2 & 3 closed

## CPU SPEED CONFIGURATION

Speed	J17	J27
6Mhz	pins 2 & 3 closed	Closed
10Mhz	pins 1 & 2 closed	Open
12Mhz	pins 1 & 2 closed	Open

## WAIT STATE CONFIGURATION

Wait states	J19
0 wait states	pins 2 & 3 closed
1 wait state	pins 1 & 2 closed