


# UNIDENTIFIED P M - 540

Card Type  
Hard Drives supported  
Floppy drives supported  
I/O options  
Data Bus  
Card Size

Multi I/O card  
Two IDE drives  
Two 360KB, 720KB, 1.2MB, or 1.44MB drives  
Hard drive connector, floppy drive connector, serial ports (2), parallel port  
16-bit ISA  
Half-length, full-height card

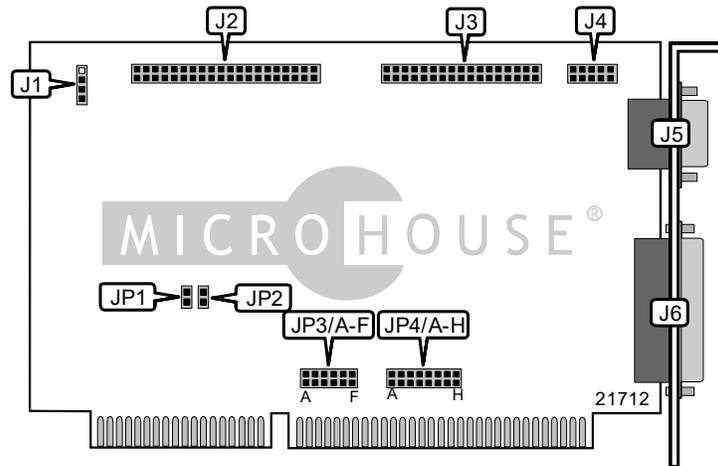

CONNECTIONS			
Function	Location	Function	Location
4-pin connector - drive active LED	J1	10-pin serial port 2 - internal	J4
40-pin primary IDE(AT) connector	J2	9-pin serial port 1 - external	J5
34-pin cable connector - floppy drive	J3	25-pin parallel port - external	J6

I/O ADDRESS ENABLE SELECTION		
I/O address	JP1	JP2
í Enabled	Closed	Closed
Disabled	Open	Open

PARALLEL PORT ADDRESS SELECTION		
Setting	JP3/E	JP3/F
í LPT1 (378h)	Closed	Open
LPT2 (278h)	Open	Closed
Disabled	Open	Open

SERIAL PORT 1 ADDRESS SELECTION		
Setting	JP3/A	JP3/C
í COM1 (3F8h)	Closed	Open
COM3 (3E8h)	Open	Closed
COM4 (2E8h)	Closed	Closed
Disabled	Open	Open

Continued on next page . . .

UNIDENTIFIED  
PM - 540

. . . continued from previous page

SERIAL PORT 2 ADDRESS SELECTION		
Setting	JP3/B	JP3/D
í COM2 (2F8h)	Closed	Open
COM3 (3E8h)	Closed	Closed
COM4 (2E8h)	Open	Closed
Disabled	Open	Open

SERIAL PORT 1 INTERRUPT SELECTION			
IRQ	JP4/F	JP4/G	JP4/H
í IRQ4	Open	Open	Closed
IRQ5	Open	Closed	Open
IRQ9	Closed	Open	Open

SERIAL PORT 2 INTERRUPT SELECTION			
IRQ	JP4/C	JP4/D	JP4/E
í IRQ3	Open	Open	Closed
IRQ5	Closed	Open	Open
IRQ9	Open	Closed	Open

PARALLEL PORT INTERRUPT SELECTION		
IRQ	JP4/A	JP4/B
IRQ5	Open	Closed
í IRQ7	Closed	Open
Disabled	Open	Open