


# UNIDENTIFIED

## ENDAT-386S/SA

<b>Processor</b>	80386SX (exact location unidentified)
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 210mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX (exact location unidentified)

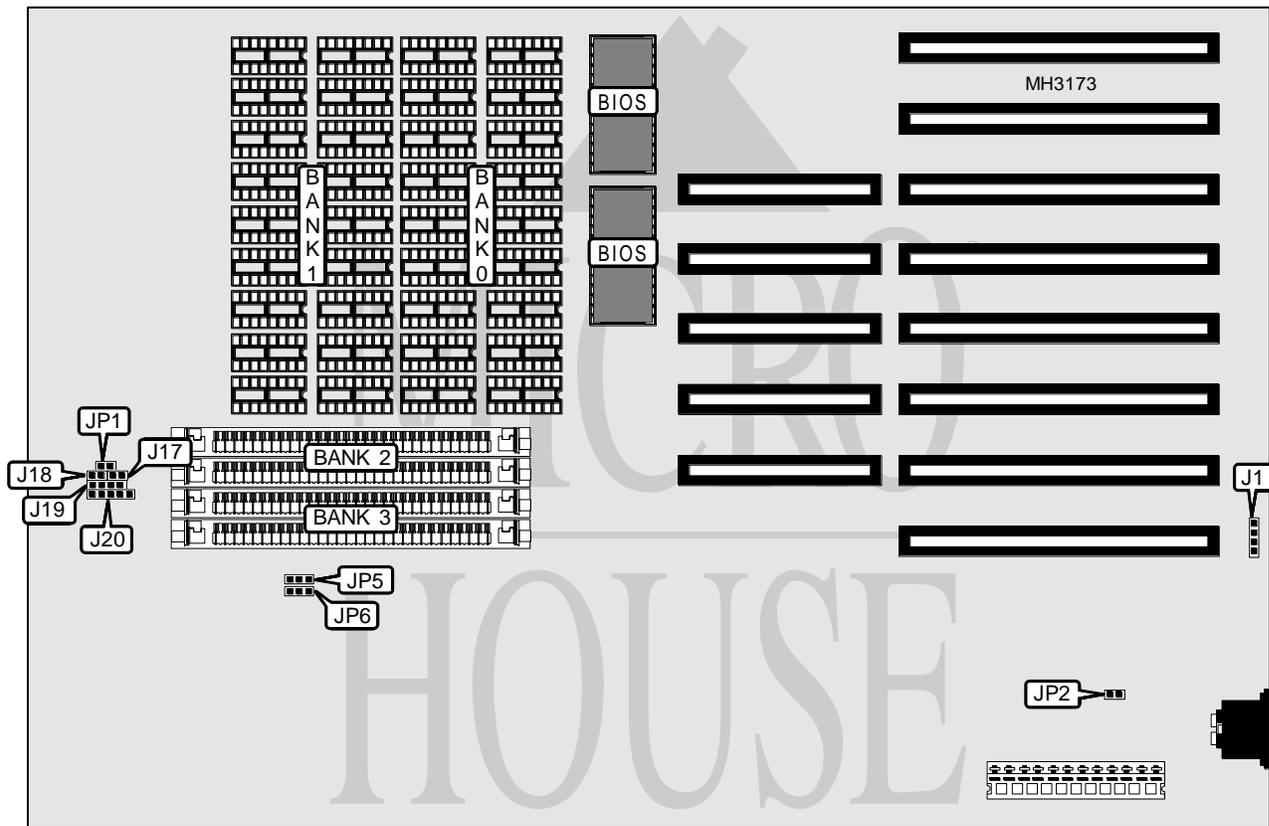

### CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J1	Speaker	J19
Turbo LED	J17	Power LED & keylock	J20
Turbo switch	J18	Reset switch	JP1

Continued on next page. . .

# UNIDENTIFIED

## ENDAT-386S/SA

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
Turbo enabled (16MHz)	J18	Closed
Turbo disabled (8MHz)	J18	Open
Monitor type select monochrome	JP2	Open
Monitor type select color	JP2	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(18) 41256	NONE	NONE	NONE
1MB	(18) 41256	(18) 41256	NONE	NONE
1.5MB	(18) 41256	(18) 41256	(2) 256K x 9	NONE
2MB	(18) 41256	(18) 41256	(2) 256K x 9	(2) 256K x 9
2MB	(18) 411000	NONE	NONE	NONE
4MB	(18) 411000	(18) 411000	NONE	NONE
6MB	(18) 411000	(18) 411000	(2) 1M x 9	NONE
8MB	(18) 411000	(18) 411000	(2) 1M x 9	(2) 1M x 9

WAIT STATE CONFIGURATION					
Page hit		Page miss		JP5	JP6
Bank hit	Bank miss	Bank hit	Bank miss		
0	0	2	2	1 & 2	1 & 2
0	N/A	2	1	1 & 2	2 & 3
1	0	2	2	2 & 3	1 & 2
2	0	3	3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.

MISCELLANEOUS TECHNICAL NOTE
Note: The location of pin 1 is unidentified.