TIARA COMPUTER SYSTEMS, INC.
L a n C a r d / E * M C L T P

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit MCA
Topology	Star
Wiring Type	Shielded/Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Available
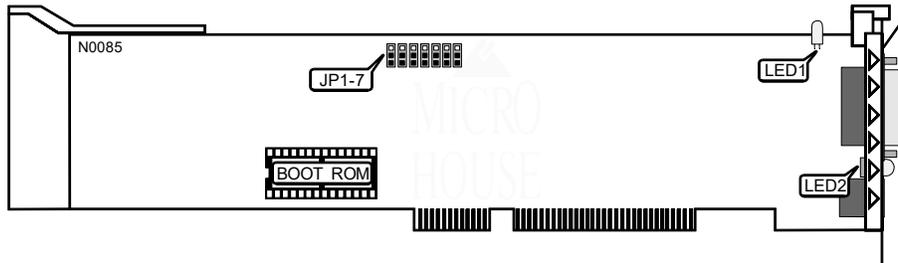
CABLE TYPE	
Type	JP1 - JP7
Shielded/Unshielded twisted pair	Pins 1 & 2 Closed
AUI transceiver via DB-15 port	Pins 2 & 3 Closed

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Power on
LED1	Off	Power off
LED2	On	Network connection is good
LED2	Off	Network connection is broken

1296