


# TEXAS INSTRUMENTS 945 WORKSTATION

<b>Processor</b>	8088
<b>Processor Speed</b>	4.77/8MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	640KB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	355mm x 305mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

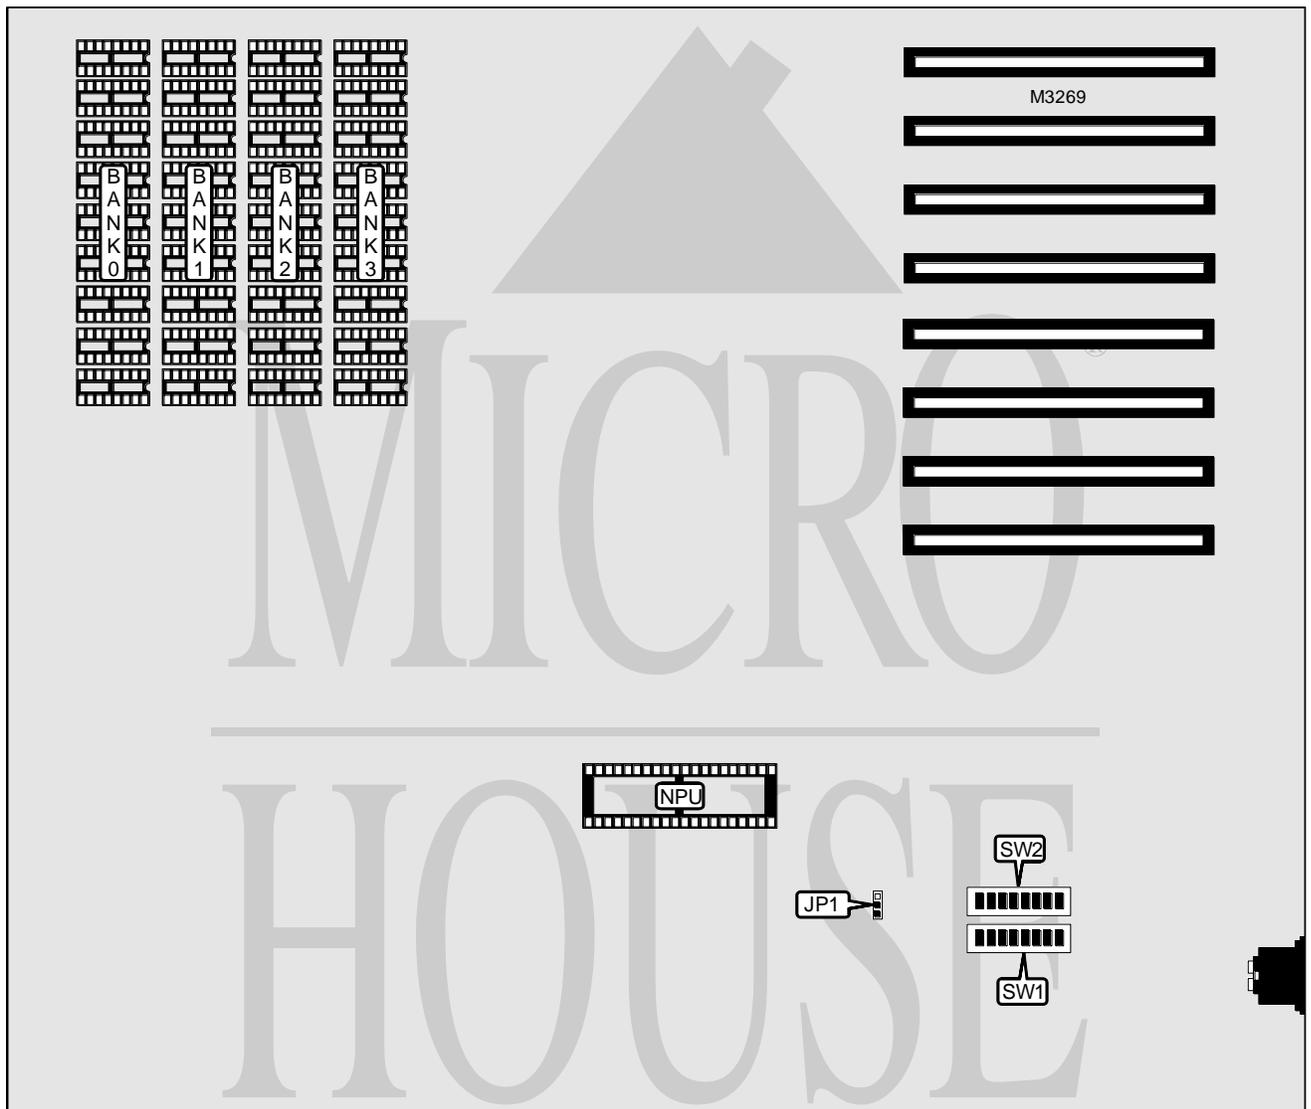

*Continued on next page. . .*

# TEXAS INSTRUMENTS

## 945 WORKSTATION

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
CPU speed select high	JP1	Pins 1 & 2 closed
CPU speed select normal	JP1	Pins 2 & 3 closed
í Floppy drives enabled	SW1/1	Off
Floppy drives disabled	SW1/1	On
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off
í Factory configured - do not alter	SW2/1	On
í Factory configured - do not alter	SW2/2	On
í Factory configured - do not alter	SW2/3	On
í Factory configured - do not alter	SW2/4	On
í Factory configured - do not alter	SW2/5	On
í Serial port enabled	SW2/7	On
Serial port disabled	SW2/7	Off
í Parallel port enabled	SW2/8	On
Parallel port disabled	SW2/8	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64KB	(9) 4164	None	None	None
128KB	(9) 4164	(9) 4164	None	None
192KB	(9) 4164	(9) 4164	(9) 4164	None
256KB (A)	(9) 4164	(9) 4164	(9) 4164	(9) 4164
256KB (B)	(9) 41256	None	None	None
512KB	(9) 41256	(9) 41256	None	None
576KB	(9) 41256	(9) 41256	(9) 4164	None
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164

DRAM SWITCH CONFIGURATION			
Size	SW1/3	SW1/4	SW2/6
64KB	On	On	Off
128KB	Off	On	Off
192KB	On	Off	Off
256KB (A)	Off	Off	Off
256KB (B)	On	On	On
512KB	Off	On	On
576KB	On	Off	On
640KB	Off	Off	On

VIDEO CONFIGURATION		
Setting	SW1/5	SW1/6
None installed	On	On
Monochrome	Off	Off
Color 40	Off	On
Color 80	On	Off

Continued on next page...

---

**TEXAS INSTRUMENTS  
945 WORKSTATION***... continued from previous page*

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	Off