


TIARA COMPUTER SYSTEMS, INC.  
LanCard/E \* MC

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit MCA  
**Topology** Linear Bus  
**Wiring Type** RG-58A/U 50ohm coaxial  
 AUI transceiver via DB-15 port  
**Boot ROM** Available

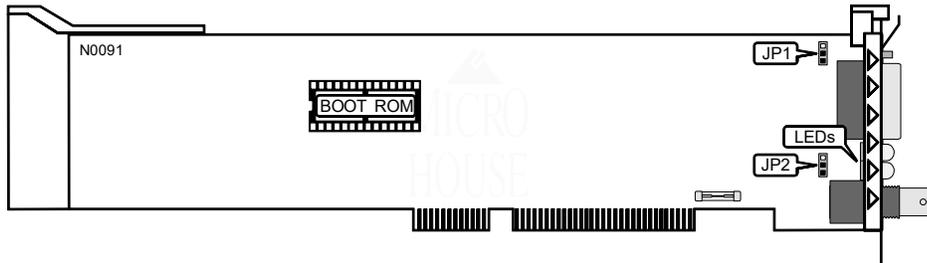

CABLE TYPE	
Type	JP1
RG-58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed

CABLE LENGTH	
Setting	JP2
Long cable segment mode (100 nodes on a single 984 foot cable)	Pins 1 & 2 closed
Short cable segment mode (30 nodes on a single 607 foot cable)	Pins 2 & 3 closed



DIAGNOSTIC LED(S)		
LED	Status	Condition
1	On	Data is being transmitted
1	Off	Data is not being transmitted
2	On	Power on
2	Off	Power Off
3	On	Data is being received
3	Off	Data is not being received
4	On	Collision is detected on network
4	Off	No collision is detected on network