


TIARA COMPUTER SYSTEMS, INC.
LanCard E/II

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus MCA
Topology Linear Bus
Wiring Type RG-58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

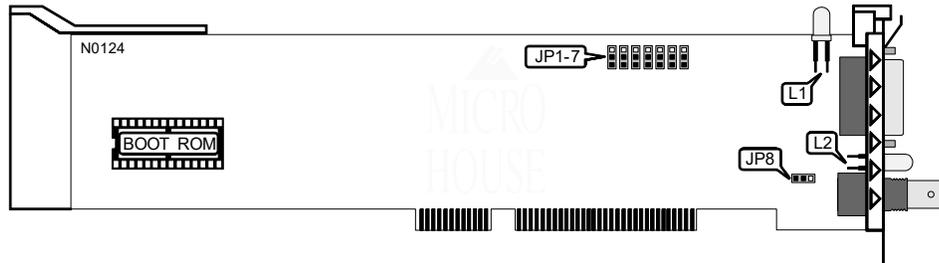

CABLE TYPE	
Type	JP1 - JP7
RG58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed

CABLE LENGTH		
Segment Length	Max # of Nodes per Segment	JP8
984 feet	100	Pins 1 & 2 closed
607 feet	30	Pins 2 & 3 closed

DIAGNOSTIC LED(S)		
LED	Status	Condition
L1	On	Power on
L1	Off	Power off
L2	Blinking	Data is being transmitted/received
L2	On	Card is transmitting continuously (jabber)

Note: LED L1 will remain off if cable type is RG58A/U 50ohm coaxial.