


TIARA COMPUTER SYSTEMS, INC.
LanCard/E * 2000

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus
Wiring Type RG-58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

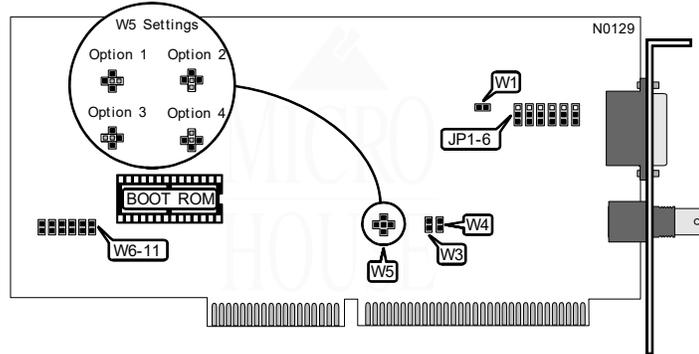

INTERRUPT REQUEST - W5	
IRQ	Option #
3	Option 3
2	Option 2
4	Option 4
5	Option 1

CABLE TYPE							
Type	JP1	JP2	JP3	JP4	JP5	JP6	W1
iCoaxial	Pins 1 & 2	Closed					
AUI	Pins 2 & 3	Open					

Note: Pins designated should be in the closed position.

BASE MEMORY ADDRESS						
Address	W6	W7	W8	W9	W10	W11
iCC00h	Closed	Closed	Closed	Open	Closed	Closed
C800h	Closed	Closed	Open	Closed	Closed	Closed
D000h	Closed	Open	Open	Closed	Closed	Closed

I/O BASE ADDRESS		
Address	W3	W4
i300h	Closed	Closed
320h	Open	Closed
340h	Closed	Open
360h	Open	Open