


# IBM CORPORATION TURBO-12 286

<b>Processor</b>	80286
<b>Processor Speed</b>	8/12MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	1MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

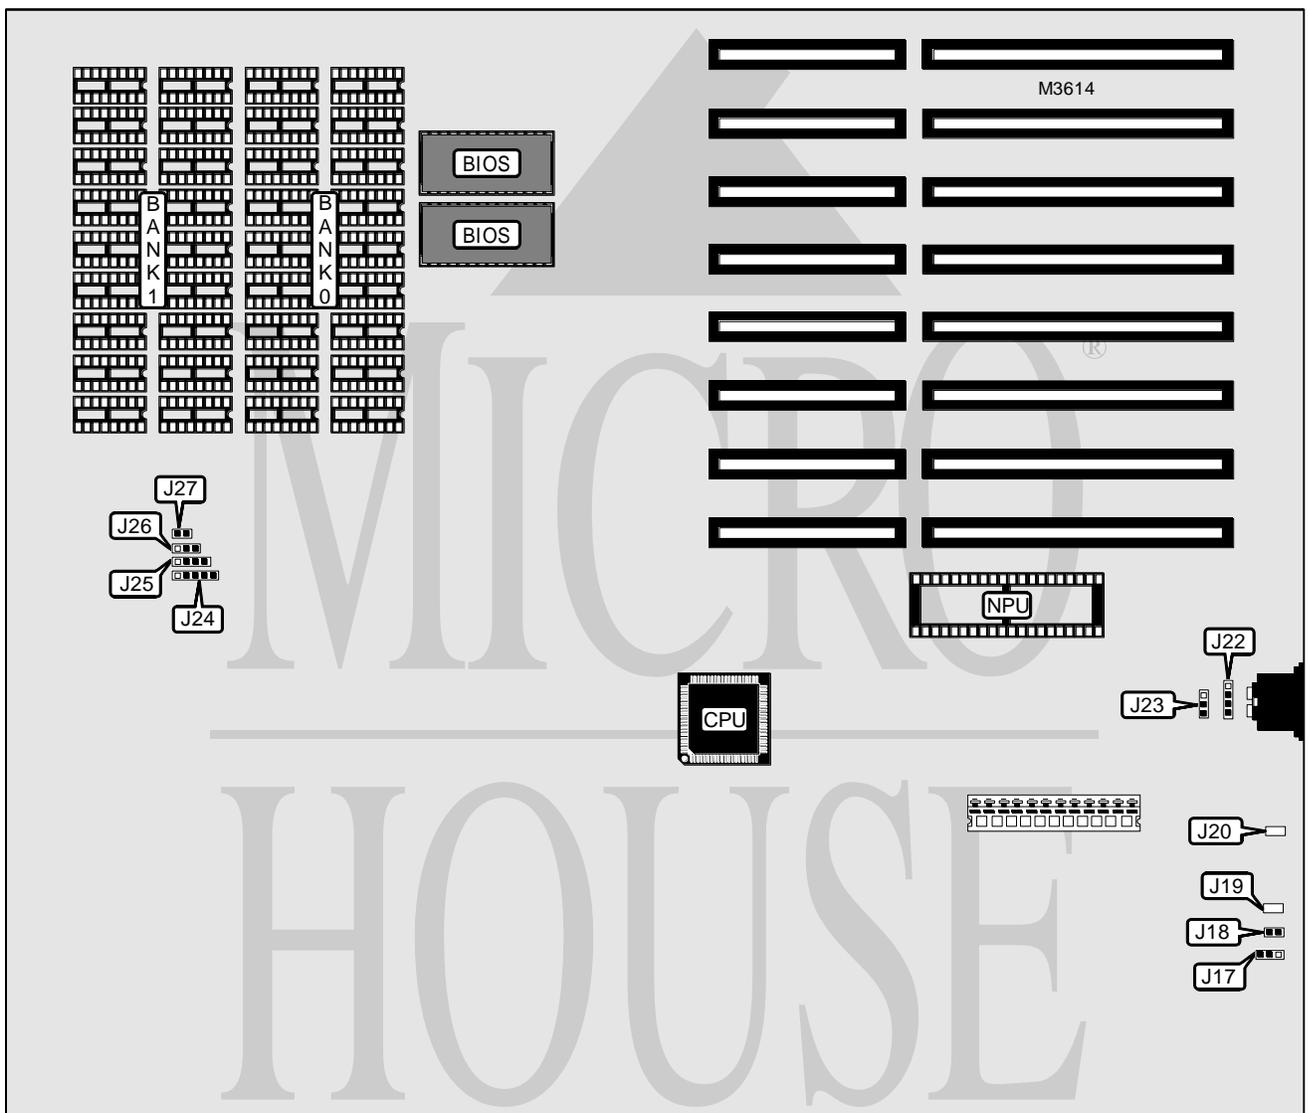

Continued on next page. . .

# IBM CORPORATION

## TURBO-12 286

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J18	Speaker	J25
External battery	J22	Turbo switch	J27
Power LED & keylock	J24		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J19	Unidentified
í Factory configured - do not alter	J20	Unidentified
Monitor type select color	J23	Pins 2 & 3 closed
Monitor type select monochrome	J23	Pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
640KB	(9) 41256	(9) 4164
1MB	(9) 41256	(9) 41256

DRAM JUMPER CONFIGURATION	
Size	J26
640KB	Pins 1 & 2 closed
1MB	Pins 2 & 3 closed

CPU SPEED SELECTION	
Speed	J17
8MHz	Pins 2 & 3 closed
12MHz	Pins 1 & 2 closed