


# UNIDENTIFIED

## CT-286/12

<b>Processor</b>	AM286/80286
<b>Processor Speed</b>	6/8/10/12MHz
<b>Chip Set</b>	C & T
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	4MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Scat
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

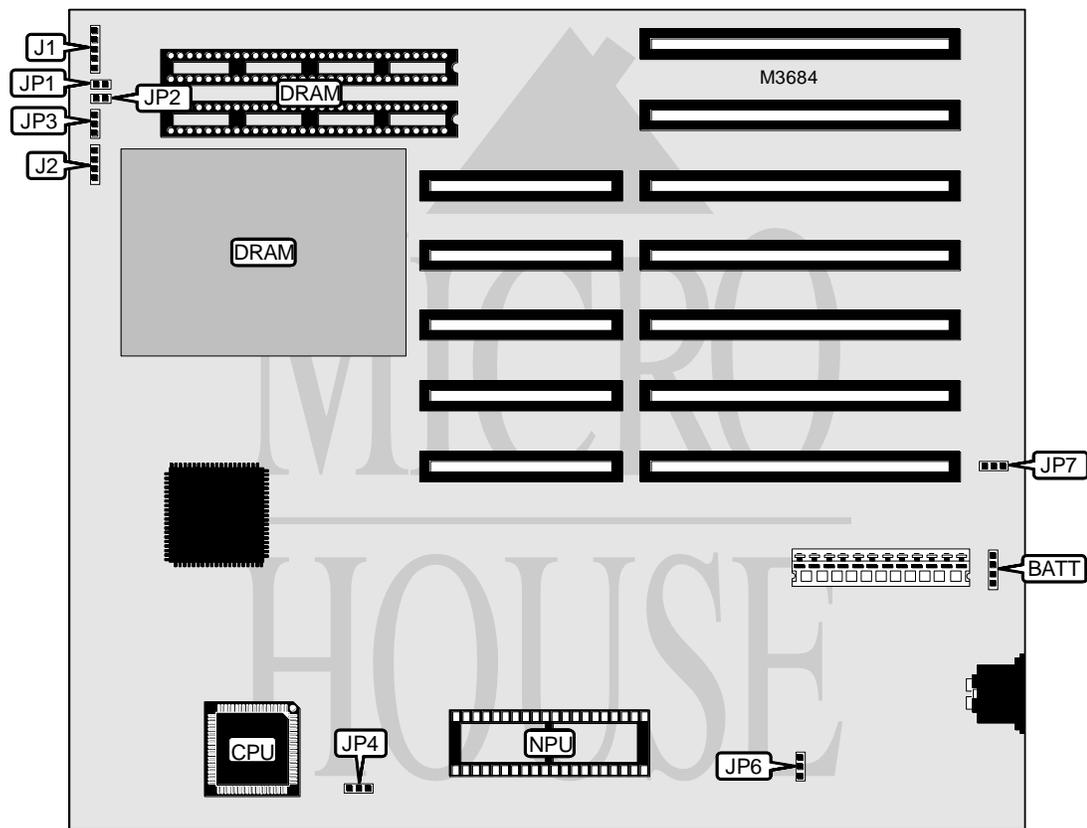

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	BATT	Turbo LED	JP1
Power LED & keylock	J1	Reset switch	JP2
Speaker	J2	Turbo switch	JP3

*Continued on next page . . .*

# UNIDENTIFIED

## CT-286/12

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
NPU speed select NPU speed = Y1/3	JP4	Pins 1 & 2 closed
NPU speed select NPU speed = Y2/3	JP4	Pins 2 & 3 closed
Monitor type select monochrome	JP6	Pins 1 & 2 closed
Monitor type select CGA/EGA/VGA	JP6	Pins 2 & 3 closed
Power good signal detect from power supply	JP7	Pins 1 & 2 closed
Power good signal detect from board	JP7	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	None
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9

Note: The location of the banks is unidentified. The amount and location of the DIP memory is unidentified.