


# PROGRESSIVE PERIPHERALS, INC.

## PROGRESSIVE 040/2000

|                               |                   |
|-------------------------------|-------------------|
| <b>Card Type</b>              | Processor upgrade |
| <b>Processor</b>              | Motorola 68040    |
| <b>Processor Speed</b>        | 25/33/40MHz       |
| <b>Chipset</b>                | Unidentified      |
| <b>Maximum Onboard Memory</b> | 32MB DRAM         |
| <b>Cache</b>                  | Unidentified      |
| <b>BIOS</b>                   | N/A               |
| <b>Dimensions</b>             | 336 x 109mm       |
| <b>NPU Options</b>            | None              |
| <b>Data Bus</b>               | Zorro II CPU slot |

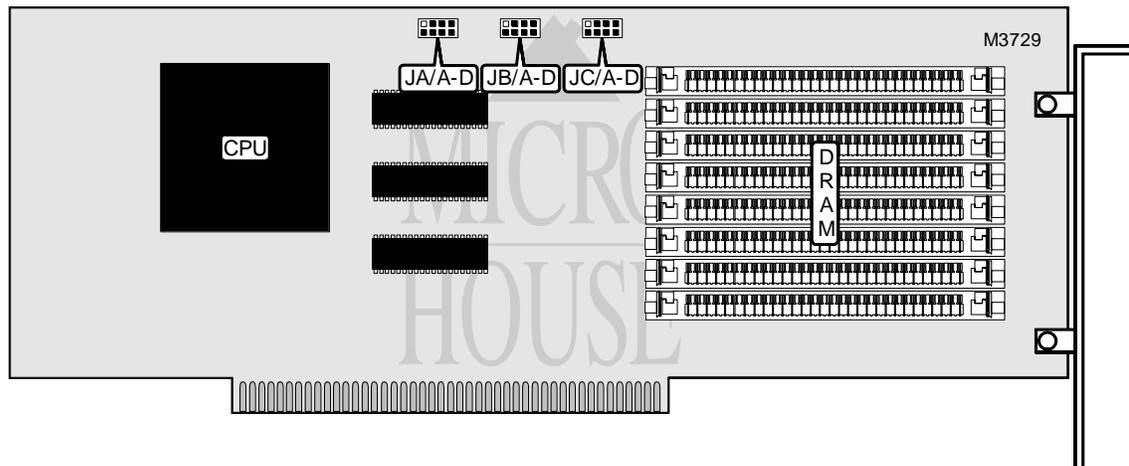

### USER CONFIGURABLE SETTINGS

| Function                                | Label | Position |
|---|-------|----------|
| í Static page mode DRAMs installed      | JB/A  | Closed   |
| Nibble mode DRAMs installed             | JB/A  | Open     |
| í Card is installed in U.S. mainboard   | JB/D  | Open     |
| Card is installed in European mainboard | JB/D  | Closed   |

### DRAM CONFIGURATION

| Size | Bank 0      | Bank 1      |
|------|-------------|-------------|
| 0MB  | None        | None        |
| 4MB  | (4) 1M x 36 | None        |
| 8MB  | (4) 1M x 36 | (4) 1M x 36 |
| 16MB | (4) 4M x 36 | None        |
| 32MB | (4) 4M x 36 | (4) 4M x 36 |

Note: The locations of the banks are unidentified.

*Continued on next page...*

**PROGRESSIVE PERIPHERALS, INC.**  
**PROGRESSIVE 040/2000**

... continued from previous page

| DRAM JUMPER CONFIGURATION |        |  |
|---------------------------|--------|--|
| Size                      | JB/B   |  |
| 0MB                       | Closed |  |
| 4MB                       | Closed |  |
| 8MB                       | Closed |  |
| 16MB                      | Open   |  |
| 32MB                      | Open   |  |

| MEMORY TO AUTO-CONFIGURE AT POWER-UP |        |        |        |
|--------------------------------------|--------|--------|--------|
| Setting                              | JA/A   | JA/B   | JB/C   |
| 0MB                                  | Open   | Closed | Closed |
| 2MB                                  | Open   | Closed | Open   |
| 4MB                                  | Closed | Open   | Closed |
| 8MB                                  | Closed | Open   | Open   |

| 68040 STATUS ON POWER-UP                   |        |        |
|--|--------|--------|
| Setting                                    | JA/C   | JA/D   |
| Disabled, fall back to mainboard processor | Closed | Open   |
| Enabled                                    | Open   | Closed |

| CACHE CONFIGURATION ON POWER-UP |        |        |
|---------------------------------|--------|--------|
| Setting                         | JC/A   | JC/B   |
| Enabled                         | Closed | Open   |
| Disabled                        | Open   | Closed |

| BURST MODE ON POWER-UP |        |        |
|------------------------|--------|--------|
| Setting                | JC/C   | JC/D   |
| Enabled                | Closed | Open   |
| Disabled               | Open   | Closed |