


ZENITH DATA SYSTEMS  
LAN 10 E - M P C

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 8-bit ISA  
**Topology** Star  
 Linear Bus  
**Wiring Type** Shielded/Unshielded twisted pair  
 AUI transceiver via DB-15 port  
 RG--58A/U 50ohm coaxial  
**Boot ROM** Available

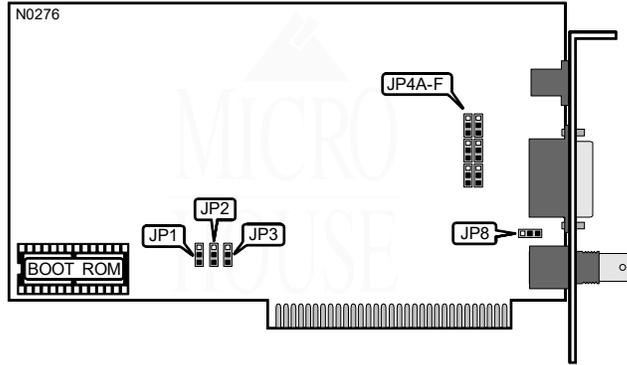

BASE MEMORY ADDRESS	
Address	JP1
CC00h	Pins 1 & 2 Closed
D000h	Pins 2 & 3 Closed

INTERRUPT REQUEST	
IRQ	JP2
5	Pins 1 & 2 Closed
10	Pins 2 & 3 Closed

BOOT ROM	
Setting	JP3
iDisabled	Pins 2 & 3 Closed
Enabled at address D8000h	Pins 1 & 2 Closed

CABLE TYPE	
Type	JP4A - JP4F
Shielded/Unshielded twisted pair	Pins 1 & 2 Closed
RG--58A/U 50ohm or AUI transceiver via DB-15 port	Pins 2 & 3 Closed

SIGNAL QUALITY	
Setting	JP8
iSQE test disabled	Pins 2 & 3 Closed
SQE test enabled	Pins 1 & 2 Closed