


ZENITH DATA SYSTEMS
LAN 4TR - XT

NIC Type	Token-Ring
Transfer Rate	4Mbps
Data Bus	8-bit ISA
Topology	Ring
Wiring Type	Shielded/Unshielded twisted pair
Boot ROM	Available

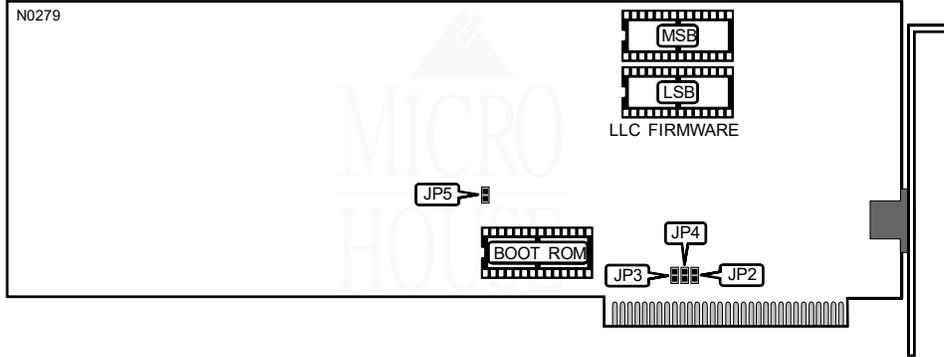

I/O BASE ADDRESS	
Address	JP2
i0A20 - 0A2Fh	Closed
0A60 - 0A6Fh	Open

INTERRUPT REQUEST	
IRQ	JP3
i2	Closed
3	Open

BOOT ROM ADDRESS		
ROM Address	Data Memory (Buffer) Address	JP4
iCC000 - CDFFFh	CE000 - DDFFFh	Closed
DC000 - DDFFFh	DE000 - DFFFFh	Open

LLC EPROM ENABLED	
Setting	JP5
iExternal EPROMs disabled	Closed
External EPROMs enabled	Open

Note: The LLC EPROMs contain the Logic Link Control program. The card will function properly with the LLC chips disabled.