


ZENITH DATA SYSTEMS
LAN 4 TR - AT

NIC Type Token-Ring
Transfer Rate 4Mbps
Data Bus 16-bit ISA
Topology Ring
Wiring Type Shielded/Unshielded twisted pair
Boot ROM Available

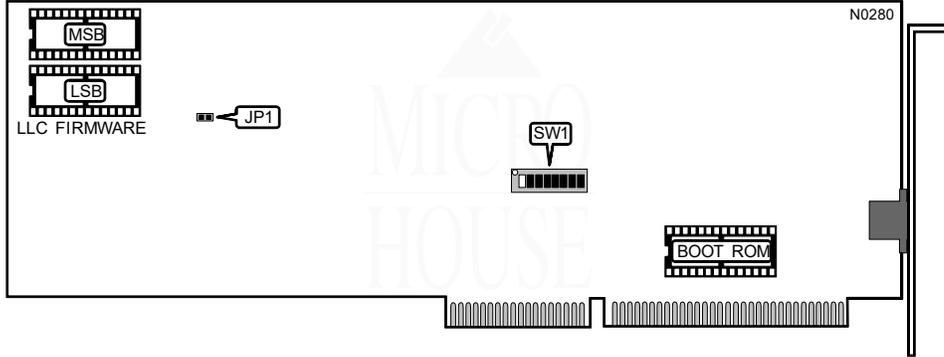

LLC EPROM ENABLED	
Setting	JP1
External EPROMs disabled	Closed
External EPROMs enabled	Open
Note: The LLC EPROMs contain the Logic Link Control program. The card will function properly with the LLC chips disabled.	

I/O BASE ADDRESS		
Address	SW1/1	SW1/2
A00 - A0Fh	On	On
A20 - A2Fh	On	Off
A40 - A4Fh	Off	On
A60 - A6Fh	Off	Off

INTERRUPT REQUEST		
IRQ	SW1/3	SW1/4
3	On	On
9	On	Off
10	Off	On
11	Off	Off

Continued next page . . .

ZENITH DATA SYSTEMS
LAN4TR - AT

... continued from previous page

BOOT ROM ADDRESS			
Address	Boot ROM Size	SW1/5	SW1/6
CC000 - CCFFFh	4KB	On	On
D0000 - D3FFFh	16KB	On	Off
D8000 - D8FFFh	4KB	Off	On
DC000 - DFFFFh	16KB	Off	Off

DMA CHANNEL		
Channel	SW1/7	SW1/8
DMA0	On	On
DMA5	On	Off
DMA6	Off	On
DMA7	Off	Off