


DIGITAL COMMUNICATIONS ASSOCIATES, INC. (DCA)  
 IRMATRAC TOKEN-RING  
 ADAPTER/CONVERTIBLE  
 4MBPS-ONLY RING INTERFACE MODULE (RIM)

**NIC Type** Token-Ring  
**Transfer Rate** 4/16Mbps  
**Data Bus** 16-bit ISA/MCA  
**Topology** Ring  
**Wiring Type** Unshielded twisted pair  
 Shielded twisted pair (DB-9 port)  
**Boot ROM** Available

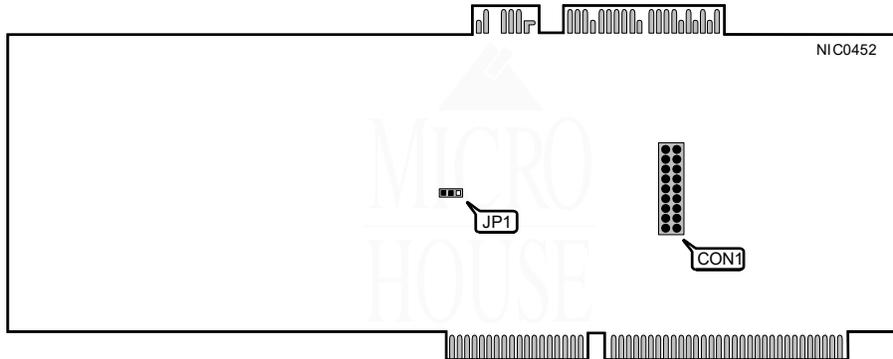


I/O BASE ADDRESS	
Address	JP1
i0A20 - 0A3Fh	Pins 1 & 2 closed
1A20 - 1A3Fh	Pins 2 & 3 closed

CONNECTIONS	
Purpose	Location
Ring Interface Module (RIM)	CON1

Continued on next page . . .

DIGITAL COMMUNICATIONS ASSOCIATES, INC. (DCA)  
 IRMATRAC TOKEN-RING  
 ADAPTER/CONVERTIBLE  
 4MBPS-ONLY RING INTERFACE MODULE (RIM)

... continued from previous page

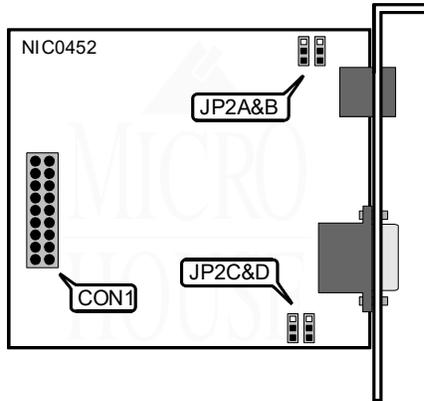

CABLE TYPE	
Type	JP2A - D
Unshielded twisted pair	Pins 1 & 2 closed
Shielded twisted pair (DB-9 port)	Pins 2 & 3 closed

CONNECTIONS	
Purpose	Location
Backplane Adapter	CON1

MISCELLANEOUS NOTES
Although the backplane adapter can have a 4/16Mbps or 4Mbps-only Ring Interface Module (RIM), the 4Mbps-only RIM is diagrammed because the 4/16Mbps RIM does not have jumpers.