


ACCTON TECHNOLOGY CORPORATION
ETHERCOAX-16 (EN1642)

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8/16-bit ISA
Topology Linear Bus
Wiring Type RG-58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

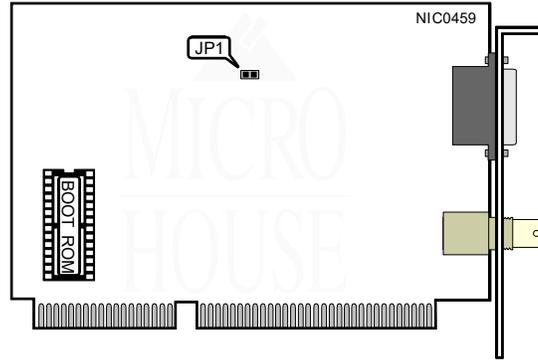

CARD CONFIGURATION						
Mode	I/O Address	IRQ	Cable Type	Boot ROM	Standard	JP1
iSoftware	Software	Software	Software	Software	Software	Open
NE1000	280h	Disabled	AUI transceiver	Disabled	IEEE 802.3	Closed

Note: The card is normally configured using the included software utility. The second configuration is provided to allow easier troubleshooting if the system will not boot or locks-up.