


# THE NETWORK INTERFACE CARD TECHNICAL GUIDE


## ACCTON TECHNOLOGY CORPORATION

### ETHERDUO-NE2 (EN-1653)

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	16-bit MCA
<b>Topology</b>	Star
<b>Wiring Type</b>	RG58A/U 50ohm coaxial Unshielded twisted pair
<b>Boot ROM</b>	Available

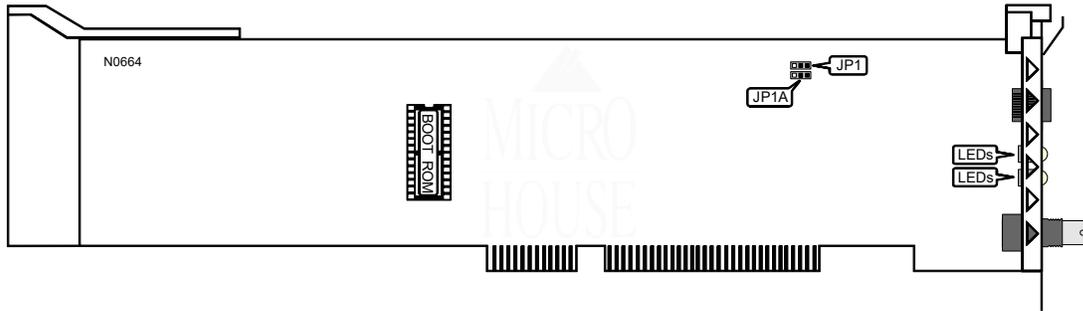

CABLE TYPE		
Type	JP1	JP1A
Unshielded twisted pair	Pins 1 & 2 closed	Pins 1 & 2 closed
RG58A/U 50ohm coaxial	Pins 2 & 3 closed	Pins 2 & 3 closed



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	10BaseT link integrity exists
LED1	Green	Off	10BaseT link integrity broken
LED2	Green	On	Data is being received
LED2	Green	Off	Data is not being received
LED3	Yellow	On	Collisions detected on network
LED3	Yellow	Off	No collisions detected on network
LED4	Green	Blinking	Data is being transmitted
LED4	Green	Off	Data is not being transmitted