


DIGITAL EQUIPMENT CORPORATION PRIORIS ZX 6000 MP

Processor	Pentium Pro
Processor Speed	133/166/200/233/266/300/330/366MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	2GB
Maximum Video Memory	Unidentified
Cache	256/512KB (located on Pentium Pro CPU)
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options (Backplane)	32-bit PCI slots (8), floppy drive interface, parallel port, PS/2 mouse port, serial ports (2), VGA port, CPU card slots (2), memory slots (2)
I/O Options (CPU)	VRM connectors (2)
NPU Options	None

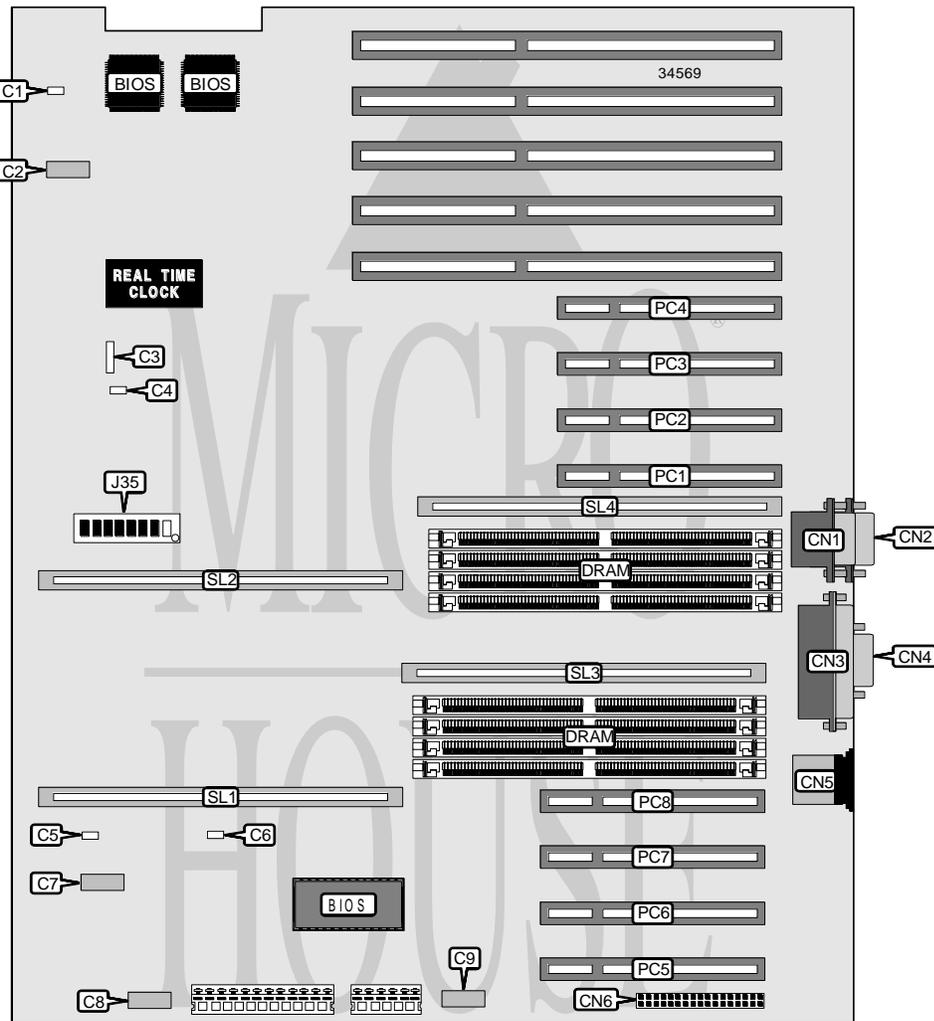

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
 PRIORIS ZX 6000 MP

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Chassis fan power	C1	Serial port	CN2
RSM connector	C2	Parallel port	CN3
Speaker	C3	VGA port	CN4
Chassis fan power	C4	PS/2 mouse port	CN5
Chassis fan power	C5	Floppy drive interface	CN6
Chassis fan power	C6	32-bit PCI slots	PC1 – PC8
OCP connector	C7	CPU card slot 1	SL1
Power control	C8	CPU card slot 2	SL2
SBM connector	C9	External memory card 1	SL3
Serial port	CN1	External memory card 2	SL4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í BIOS upgrade enabled	J35/1	On
BIOS upgrade disabled	J35/1	Off
í Flash BIOS normal operation	J35/2	Off
Flash BIOS recovery mode	J35/2	On
í Boot block disabled	J35/3	Off
Boot block enabled	J35/3	On
í Password normal operation	J35/4	Off
Password clear	J35/4	On
í RSM not installed	J35/5	On
RSM installed	J35/5	Off
í NVRAM memory normal operation	J35/6	Off
NVRAM memory clear	J35/6	On
í Factory configured - do not alter	J35/8	Off

SIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64MB	(2) 8M x 36	None	None	None
128MB	(2) 8M x 36	(2) 8M x 36	None	None
128MB	(2) 16M x 36	None	None	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36	None
256MB	(2) 8M x 36			
256MB	(2) 16M x 36	(2) 16M x 36	None	None
256MB	(2) 32M x 36	None	None	None
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36	None
512MB	(2) 64M x 36	None	None	None
512MB	(2) 16M x 36			
512MB	(2) 32M x 36	(2) 32M x 36	None	None

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
 PRIORIS ZX 6000 MP

... continued from previous page


SIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
768MB	(2) 32M x 36	(2) 32M x 36	(2) 32M x 36	None
1024MB	(2) 64M x 36	(2) 64M x 36	None	None
1024MB	(2) 32M x 36			
1536MB	(2) 64M x 36	(2) 64M x 36	(2) 64M x 36	None
2048MB	(2) 64M x 36			

Note: 64MB minimum on 1P server configuration. 128MB minimum on 2P server configuration.

VIDEO MEMORY CONFIGURATION
Note: The location and size of the video memory is unidentified.

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium Pro CPU.

CPU BUS SPEED SELECTION	
Speed	J35/7
60MHz	Off
66MHz	On

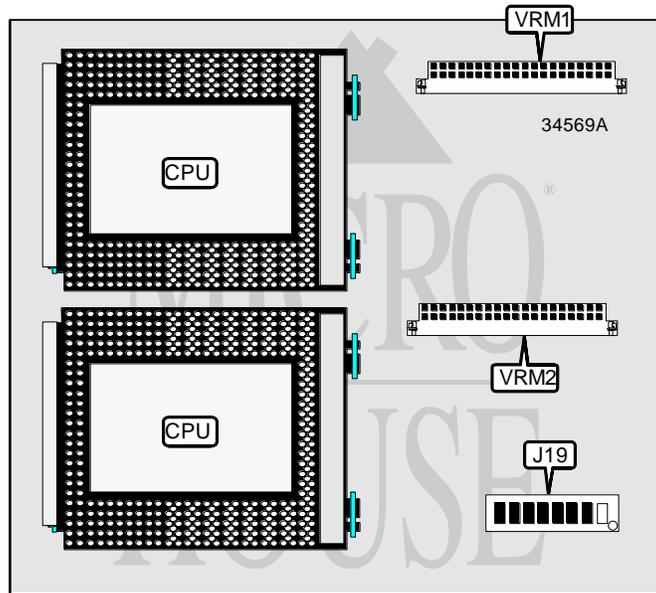

CONNECTIONS			
Purpose	Location	Purpose	Location
VRM connector	VRM1	VRM connector	VRM2

Continued on next page...

DIGITAL EQUIPMENT CORPORATION
 PRIORIS ZX 6000 MP

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J19/4	Up
í Factory configured - do not alter	J19/8	Up

CPU SPEED SELECTION							
CPU core	Bus ratio	J19/1	J19/2	J19/3	J19/5	J19/6	J19/7
120MHz	133MHz	Down	Down	Down	Down	Down	Down
150MHz	166MHz	Down	Down	Up	Down	Down	Up
180MHz	200MHz	Up	Down	Down	Up	Down	Up
210MHz	233MHz	Up	Down	Up	Up	Down	Down
240MHz	266MHz	Down	Up	Down	Down	Up	Down
270MHz	300MHz	Down	Up	Up	Down	Up	Up
300MHz	330MHz	Up	Up	Down	Up	Up	Down
330MHz	366MHz	Up	Up	Up	Up	Up	Up