


# RADISYS CORPORATION

## EPC-33, EPC-34

<b>Processor</b>	80486DX2/80486DX4
<b>Processor Speed</b>	50(internal)/100(internal)MHz
<b>Chip Set</b>	Pico Power
<b>Video Chip Set</b>	Cirrus Logic
<b>Maximum Onboard Memory</b>	32MB
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	256KB
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	Unidentified
<b>I/O Options</b>	Ethernet 10BaseT connector, floppy drive interface, IDE interface, parallel port, serial ports (2), VGA port, PC/104 connectors (2), VGA feature connector, flat panel connector
<b>NPU Options</b>	None

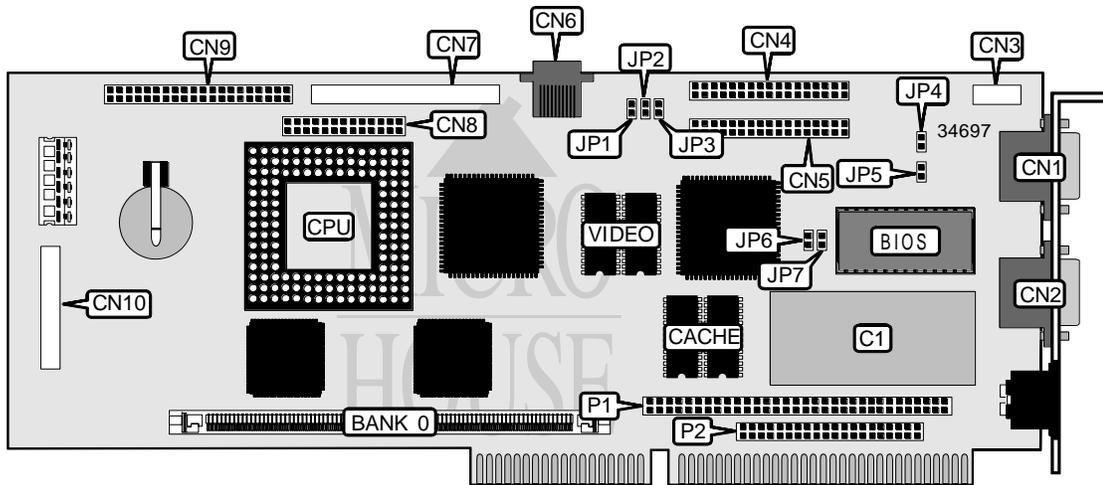

CONNECTIONS			
Purpose	Location	Purpose	Location
M-Systems Flash Module	C1	Ethernet 10BaseT connector	CN6
VGA port	CN1	Flat panel connector	CN7
Serial port 1	CN2	VGA feature connector	CN8
VGA interface	CN3	IDE interface	CN9
Serial port 2/parallel port	CN4	PC/104 connector	P1
Floppy drive interface	CN5	PC/104 connector	P2

Continued on next page. . .

RADISYS CORPORATION  
EPC-33, EPC-34

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Factory configured - do not alter	CN10	Unidentified
Flash BIOS boot block write protect disabled	JP4	Open
Flash BIOS boot block write protect enabled	JP4	Closed
Flash BIOS write protect disabled	JP5	Open
Flash BIOS write protect enabled	JP5	Closed
Flash BIOS normal operation	JP6	Open
Flash BIOS recovery mode	JP6	Closed
External MDA graphics card not installed	JP7	Open
External MDA graphics card installed	JP7	Closed

SIMM CONFIGURATION	
Size	Bank 0
4MB	(1) 1M x 36
8MB	(1) 2M x 36
16MB	(1) 4M x 36
32MB	(1) 8M x 36

CACHE CONFIGURATION
Note: 256KB cache is factory installed and is not configurable.

VIDEO MEMORY CONFIGURATION
Note: 1MB video memory is factory installed and is not configurable.

LCD FLAT PANEL SELECTION			
Setting	JP1	JP2	JP3
Sharp LM64C35P	Closed	Closed	Open
Sharp LM64P89	Closed	Open	Closed
Sharp LQ10D131	Closed	Open	Open
Sharp LQ10DH11	Open	Open	Closed
NEC NL6448AC	Open	Open	Open