


**SYSKONNECT, INC.**  
**SK-NET G16/TP**

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 8/16-bit ISA  
**Topology** Linear bus  
 Star  
**Wiring Type** DIX transceiver via DB-15 port  
 Unshielded twisted pair  
**Boot ROM** Available

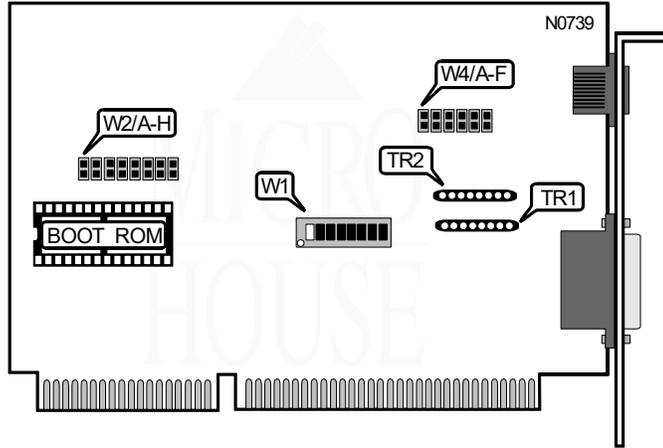

BOOT ROM	
Setting	W1/2
Disabled	On
Enabled	Off

BASE MEMORY ADDRESS			
Address	\ '1/3	\ '1/4	\ '1/5
DC00h	Off	Off	Off
C000h	On	On	On
C400h	Off	On	On
C800h	On	Off	On
CC00h	Off	Off	On
D000h	On	On	Off
D400h	Off	On	Off
D800h	On	Off	Off

CABLE TYPE		
Type	TR1	TR2
Thick Ethernet	Installed	Not installed
Twisted pair	Not installed	Installed

Continued on next page . . .

SYSKONNECT, INC.  
SK-NET G16/TP

... continued from previous page

DATA BUS SIZE (VERSION A)								
Size	W2/A	W2/B	W2/C	W2/D	W2/E	W2/F	W2/G	W2/H
16-bit	Closed							
8-bit	Closed							

DATA BUS SIZE (VERSION B)								
Size	W2/A	W2/B	W2/C	W2/D	W2/E	W2/F	W2/G	W2/H
16-bit	Closed	Open						
8-bit	Open	Closed						

IMPEDANCE						
Setting	W4/A	W4/B	W4/C	W4/D	W4/E	W4/F
100ohm	Closed	Closed	Closed	Closed	Closed	Closed
150ohm	Open	Open	Open	Open	Open	Open

INTERRUPT CONFIGURATION	
IRQ3	W1/1
Enabled	On
Disabled	Off

I/O ADDRESS			
Address	\ '1/6	\ '1/7	\ '1/8
390h	Off	Off	Off
100h	On	On	On
180h	Off	On	On
208h	On	Off	On
220h	On	On	Off
288h	Off	On	Off
320h	Off	Off	On
328h	On	Off	Off