


# DIGITAL EQUIPMENT CORPORATION PRIORIS XL 6000

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium
<b>Processor Speed</b>	166/180/200MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	512MB
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	Unidentified
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	32-bit PCI slots (3), Ethernet 10/100BaseT connector, floppy drive interface, Wide SCSI interface, parallel port, PS/2 mouse port, serial ports (2), VGA port, ATX power connector
<b>NPU Options</b>	None

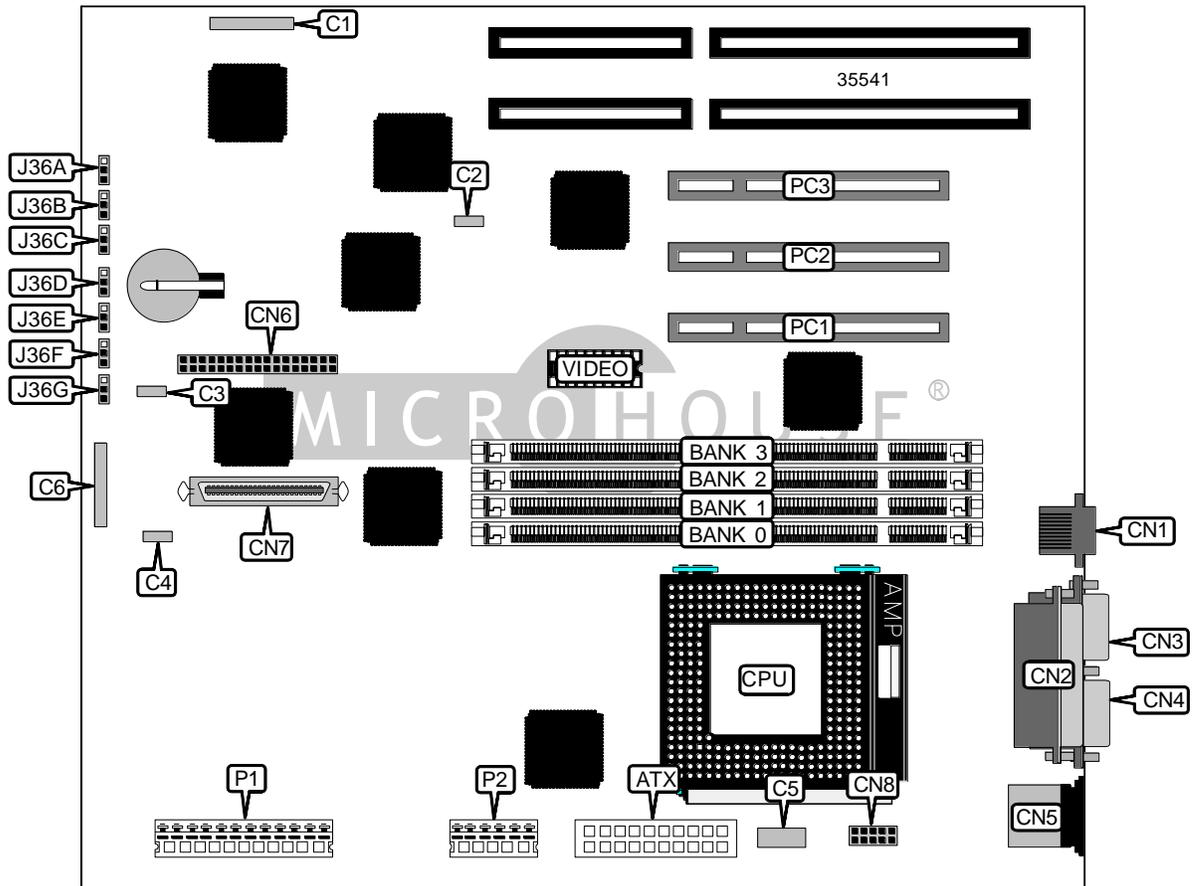

*Continued on next page...*

DIGITAL EQUIPMENT CORPORATION  
PRIORIS XL 6000

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	VGA port	CN3
SMM module connector	C1	Serial port 1	CN4
SCSI interface LED	C2	PS/2 mouse port	CN5
Chassis fan power 1	C3	Floppy drive interface	CN6
Chassis fan power 2	C4	Wide SCSI interface	CN7
Front panel connector	C5	Serial port 2	CN8
ATX interface	C6	5v power	P1
Ethernet 10/100BaseT connector	CN1	3.3v power	P2
Parallel port	CN2	32-bit PCI slots	PC1 – PC3

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	J36A	Pins 1 & 2 closed
CMOS memory clear	J36A	Pins 2 & 3 closed
í Password normal operation	J36B	Pins 1 & 2 closed
Password clear	J36B	Pins 2 & 3 closed
í Flash BIOS write disabled	J36C	Pins 1 & 2 closed
Flash BIOS write enabled	J36C	Pins 2 & 3 closed
í Intrusion detection enabled	J37D	Pins 1 & 2 closed
Intrusion detection disabled	J37D	Pins 2 & 3 closed
í Flash BIOS normal operation	J37E	Pins 1 & 2 closed
Flash BIOS recovery mode	J37E	Pins 2 & 3 closed

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
16MB	(1) 2M x 64	None	None	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64			
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None

Continued on next page...

DIGITAL EQUIPMENT CORPORATION  
 PRIORIS XL 6000

... continued from previous page

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
128MB	(1) 16M x 64	None	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64			
144MB	(1) 16M x 64	(1) 2M x 64	None	None
160MB	(1) 16M x 64	(1) 4M x 64	None	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
224MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64			
288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
512MB	(1) 16M x 64			

CACHE CONFIGURATION
Note: The size and location of the cache is unidentified.

VIDEO MEMORY CONFIGURATION
Note: The size of the video memory is unidentified.

CPU SPEED SELECTION				
CPU speed	Clock speed	Multiplier	J37F	J37G
166MHz	66MHz	2.5x	Pins 1 & 2 closed	N/A
180MHz	60MHz	3x	Pins 2 & 3 closed	N/A
200MHz	66MHz	3x	N/A	Pins 1 & 2 closed