


**SYSKONNECT, INC.**  
**SK-NET TROPICBLUE**

**NIC Type** Token Ring  
**Transfer Rate** 4/16Mbps  
**Data Bus** 8/16-bit ISA  
**Topology** Ring  
**Wiring Type** Shielded twisted pair via DB-9 port  
 Unshielded twisted pair  
**Boot ROM** Via firmware

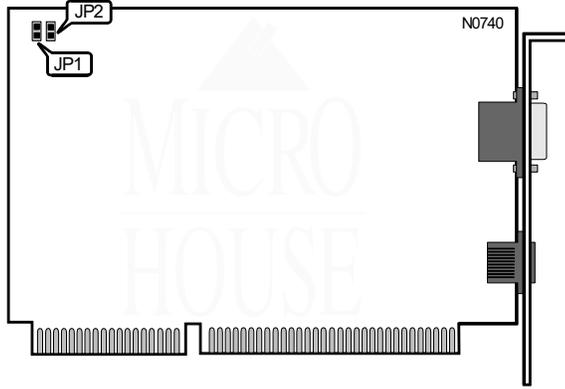

| INTERRUPT CONFIGURATION |        |
|-------------------------|--------|
| IRQ2                    | JP1    |
| í Enabled               | Closed |
| Disabled                | Open   |

| PRIMARY/ALTERNATE ADAPTER  |        |
|--|--------|
| Setting  | JP2    |
| í Primary  | Closed |
| Alternate  | Open   |
| Note: Up to two TropicBlue adapters may be installed in a system, so long as they do not share the same JP2 setting. |        |