


RELIALOGIC CORPORATION PRIVATE LTD.
CL6002CT

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear bus
Wiring Type RG58A/U 50ohm coaxial
 Unshielded twisted pair
Boot ROM Available

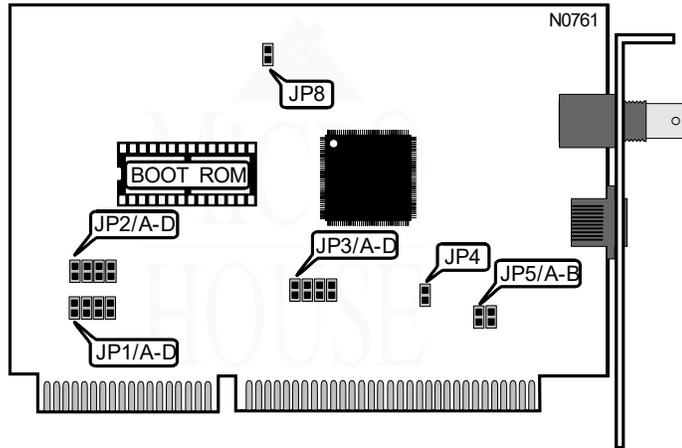

ADDRESS SELECT			
I/C Address	Base Memc / Address	P5/A	P5/B
í 300h	C8000h	Closed	Closed
320h	CC000h	Closed	Open
340h	D0000h	Open	Closed
360h	D4000h	Open	Open

BOOT ROM	
Setting	JP4
í Enabled	Closed
Disabled	Open

CABLE TYPE			
Type	P6	P7	P8
í Thin Ethernet	Pins 2 & 3 closed	Pins 2 & 3 closed	Closed
Thick Ethernet	Pins 1 & 2 closed	Pins 1 & 2 closed	Open

Note: The exact locations of JP6 & JP7 are unspecified in manufacturer documentation.

Continued on next page . . .

... continued from previous page

DMA CONFIGURATION								
DMA	JP1/A	JP1/B	JP1/C	JP1/D	JP2/A	JP2/B	JP2/C	JP2/D
5	Open	Open	Closed	Open	Open	Open	Closed	Open
3	Open	Open	Open	Closed	Open	Open	Open	Closed
6	Open	Closed	Open	Open	Open	Closed	Open	Open
7	Closed	Open	Open	Open	Closed	Open	Open	Open

INTERRUPT SELECT				
IRQ	JP3/A	JP3/B	JP3/C	JP3/D
IRQ3	Closed	Open	Open	Open
IRQ4	Open	Closed	Open	Open
IRQ5	Open	Open	Closed	Open
IRQ9	Open	Open	Open	Closed