


COMPU-SHACK PRODUCTION, GMBH CS-ETHERNET-KARTE NE1

NIC Type: Ethernet
 Transfer Rate: 10Mbps
 Data Bus: 8-bit ISA
 Topology: Linear Bus
 Wiring Type AUI transceiver via DB-15 port
 RG58A/U 50ohm coaxial
 Boot ROM Available

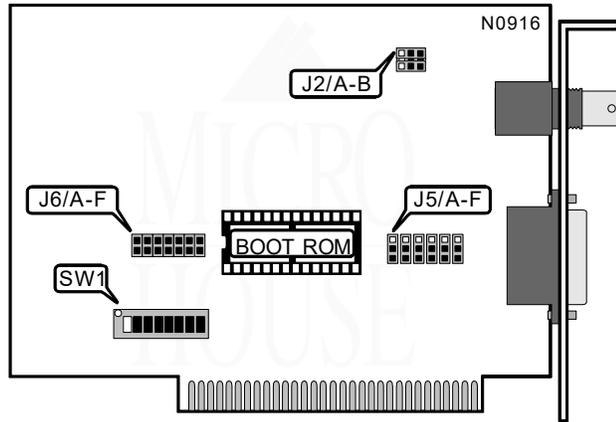

BNC TYPE		
Setting	J2/jumper A	J2/jumper B
i RG58A J 50ohm coaxial	Pins & 3 closed	Pins &3 closed
RG62A J 93ohm coaxial	Pins & 2 closed	Pins & 2 closed

WIRING TYPE SELECT - J5						
Setting	Jumper A	jumper B	Jumper C	Jumper D	Jumper E	Jumper F
BNC	1 & 2 closed					
AUI	2 & 3 closed					

INTERRUPT SELECT - J6					
IRQ	Jumper B	Jumper C	Jumper D	Jumper E	Jumper F
i IRQ3	Open	Closed	Open	Open	Open
IRQ2	Closed	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open
IRQ5	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Closed

Continued on next page. . .

COMPU-SHACK PRODUCTION, GMBH
CS-ETHERNET KARTE NE1

... continued from previous page

I/O ADDRESS				
Address	SW1/1	SW1/2	SW1/3	SW1/4
300h	Off	On	On	On
200h	On	On	On	On
220h	On	On	On	Off
240h	On	On	Off	On
260h	On	On	Off	Off
280h	On	Off	On	On
2A0h	On	Off	On	Off
2C0h	On	Off	Off	On
2E0h	On	Off	Off	Off
320h	Off	On	On	Off
340h	Off	On	Off	On
360h	Off	On	Off	Off
380h	Off	Off	On	On
3A0h	Off	Off	On	Off
3C0h	Off	Off	Off	On
3E0h	Off	Off	Off	Off

BOOT ROM ADDRESS				
Address	SW1/5	SW1/6	SW1/7	SW1/8
Disabled	N/A	N/A	N/A	Off
C000h	On	On	On	On
C400h	On	On	Off	On
C800h	On	Off	On	On
CC00h	On	Off	Off	On
D000h	Off	On	On	On
D400h	Off	On	Off	On
D800h	Off	Off	On	On
DC00h	Off	Off	Off	On

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
J6/jumper 1	Open