


Chapter 5: Jumper Settings
SYSKONNECT, INC.
SK-52XX (MCA)

NIC Type FDDI
Transfer Rate 100Mbps
Data Bus 16-bit MCA
Topology Ring
Wiring Type Shielded twisted pair (SAS)
 Fiber optic cable (MIC)
Boot ROM Available (location unidentified)

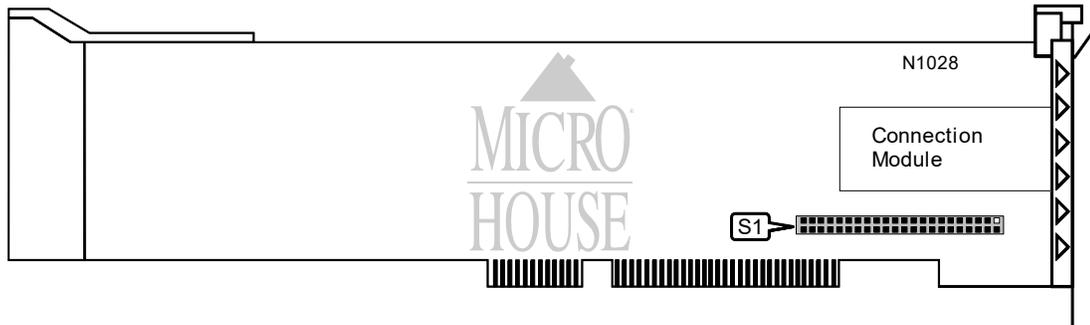

CONNECTIONS	
Purpose	Location
Daughter board connector	S1

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Network connection is good
LED1	Green	Off	Network connection is not good
LED2	Amber	On	SMT is running
LED2	Amber	Off	SMT is not running

Note: The location of LED1 and LED2 are unidentified by the manufacturer.