


Chapter 5: Jumper Settings
SYSKONNECT, INC.
SK-53XX (EISA)

NIC Type FDDI
Transfer Rate 100Mbps
Data Bus 16-bit MCA
Topology Ring
Wiring Type Shielded twisted pair (SAS)
 Fiber optic cable (MIC)
Boot ROM Available (location unidentified)

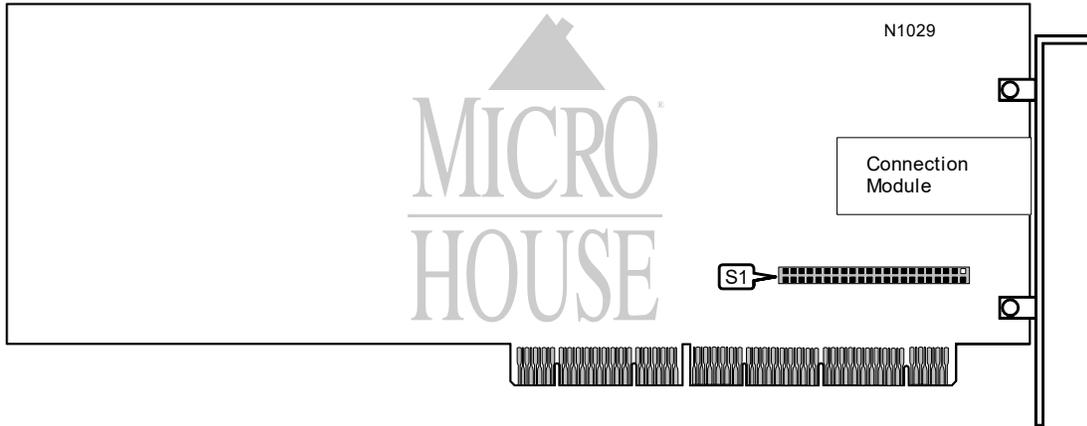

CONNECTIONS	
Purpose	Location
Daughter board connector	S1