Chapter 5: Jumper Settings

SVEC COMPUTER CORPORATION
F D 0 4 9 0 I

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star & Linear Bus
Wiring Type	Unshielded twisted pair AUI Transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	Available

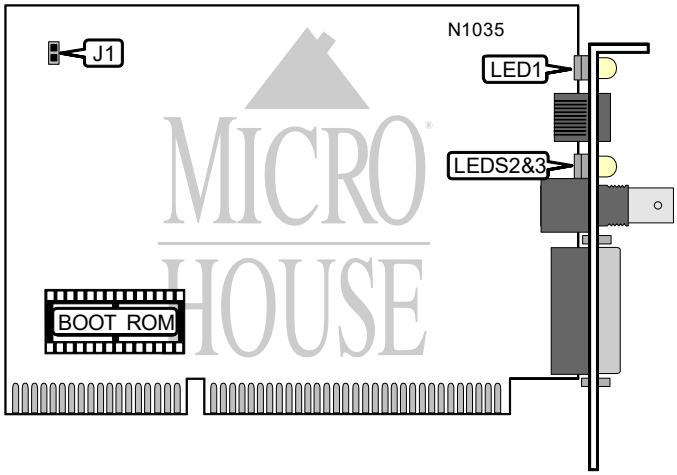

CONNECTIONS	
Purpose	Location
External LED	J1



Continued next page...

. . . continued from previous page.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Link status OK
LED1	Yellow	Off	Link status broken
LED2	Yellow	On	IRQ conflict occurring
LED2	Yellow	Off	IRQ conflict not occurring
LED3	Green	On	Network activity detected
LED3	Green	Off	Network activity not detected