


Chapter 5: Jumper Settings
SYSKONNECT, INC.
SK-NET FLASH 10/100

NIC Type Ethernet
Transfer Rate 10/100Mbps
Data Bus PCI
Topology Star
Wiring Type Unshielded twisted pair
Boot ROM Not available

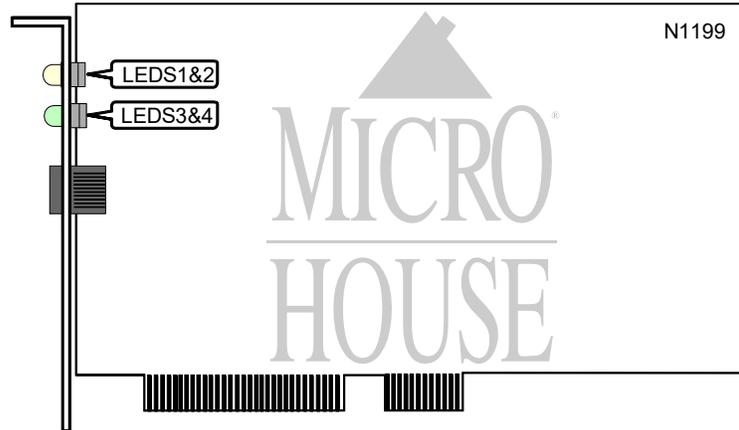

| DIAGNOSTIC LED(S) | | | |
|-------------------|--------|----------|--|
| LED | Color | Status | Condition |
| LED1 | Yellow | On | Card is transmitting at 100Mbps |
| LED1 | Yellow | Off | Card is not transmitting at 100Mbps |
| LED2 | Yellow | On | Card is transmitting at 10Mbps |
| LED2 | Yellow | Off | Card is not transmitting at 10Mbps |
| LED3 | Green | On | Network connection is good |
| LED3 | Green | Off | Network connection is broken |
| LED4 | Green | Blinking | Data is being transmitted/received |
| LED4 | Green | Off | Data is not being transmitted/received |