


FREE COMPUTER TECHNOLOGY, INC.

80486ISA (03-009X-00)

Configuration

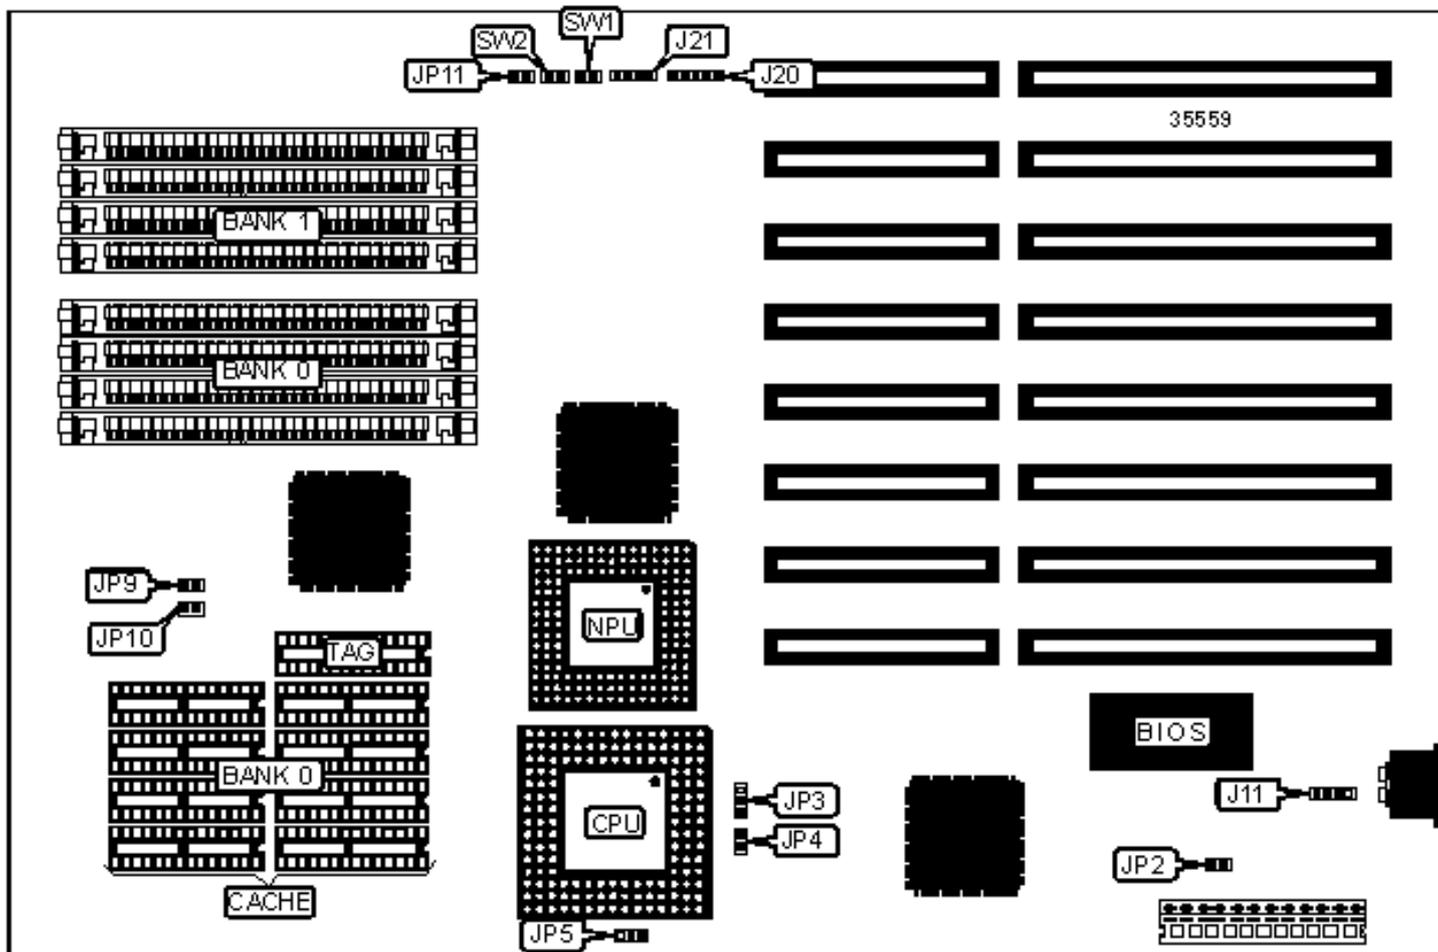

## CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J11	Turbo LED	JP11
Power LED & keylock	J20	Reset switch	SW1
Speaker	J21	Turbo switch	SW2

## USER CONFIGURABLE SETTINGS

Function	Label	Position
Monitor type select color	JP2	Open
Monitor type select monochrome	JP2	Closed

## SIMM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

## CACHE CONFIGURATION

Size	Bank 0	TAG
64KB	(8) 8K x 8	(1) 8K x 8

256KB	(8) 32K x 8	(1) 32K x 8
-------	-------------	-------------

<b>CACHE JUMPER CONFIGURATION</b>		
Size	JP9	JP10
64KB	Open	Open
256KB	Closed	Closed

<b>CPU TYPE SELECTION</b>			
Type	JP3	JP4	JP5
80486SX	Open	Open	Pins 2 & 3 closed
80487SX	Pins 1 & 2 closed	Closed	Pins 1 & 2 closed
80486DX	Pins 2 & 3 closed	Closed	Pins 1 & 2 closed