


**Chapter 5: Jumper Settings**  
**ACCTON TECHNOLOGY CORPORATION**  
**ETHERDUO-16 (EN1666)**

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit ISA  
**Topology** Linear Bus/Star  
**Wiring Type** Unshielded twisted pair  
 RG-58A/U 50ohm coaxial  
**Boot ROM** Available

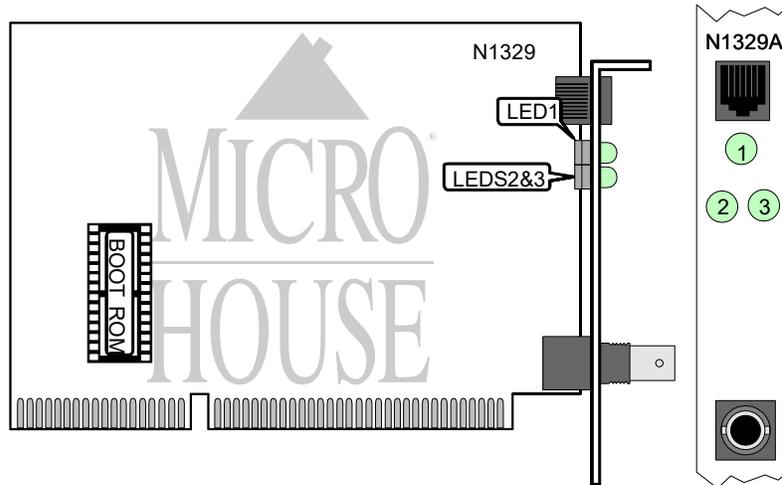

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	10Base-T network connection is good
LED1	Green	Off	10Base-T network connection is broken
LED2	Green	Blinking	Data is being transmitted
LED2	Green	Off	Data is not being transmitted
LED3	Green	Blinking	Data is being received
LED3	Green	Off	Data is not being received