


Chapter 5: Jumper Settings
ACCTON TECHNOLOGY CORPORATION
ETHERCOMBO-16 (EN1660)

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus/Star
Wiring Type Unshielded twisted pair
 AUI Transceiver via DB-15 port
 RG-58A/U 50ohm coaxial

Boot ROM Available

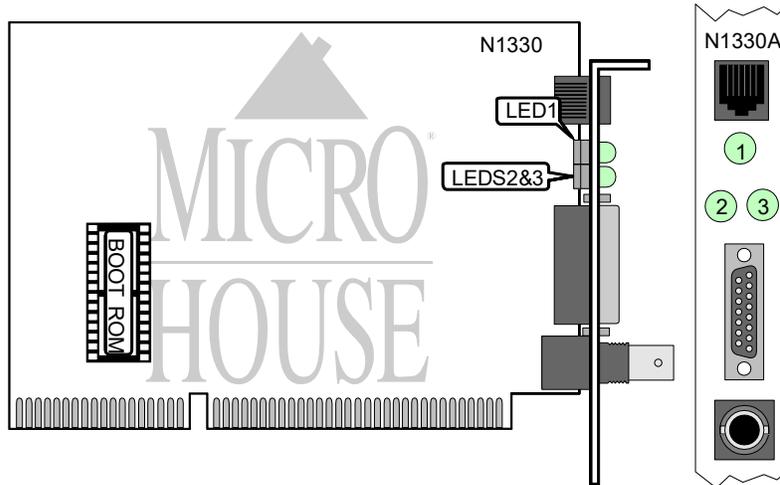

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	10Base-T network connection is good
LED1	Green	Off	10Base-T network connection is broken
LED2	Green	Blinking	Data is being transmitted
LED2	Green	Off	Data is not being transmitted
LED3	Green	Blinking	Data is being received
LED3	Green	Off	Data is not being received