


Chapter 5: Jumper Settings
SVEC COMPUTER CORPORATION
F D O 4 5 5

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus PCI
Topology Linear Bus/Star
Wiring Type Unshielded twisted pair
 AUI Transceiver via DB-15 port
 RG-58A/U 50ohm coaxial
Boot ROM Not available

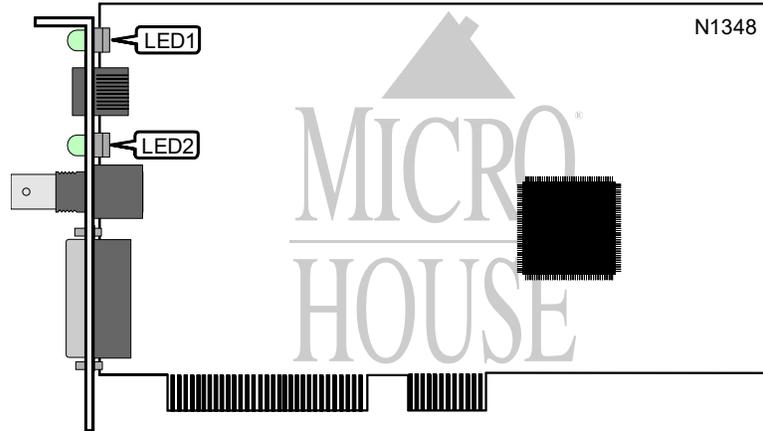

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	10Base-T network connection is good
LED1	Green	Off	10Base-T network connection is broken or not being used
LED2	Green	On	Data is being transmitted/received
LED2	Green	Off	Data is not being transmitted/received