


TOTEM TECHNOLOGY CO., LTD.

TM-P2BXATVA

Configuration

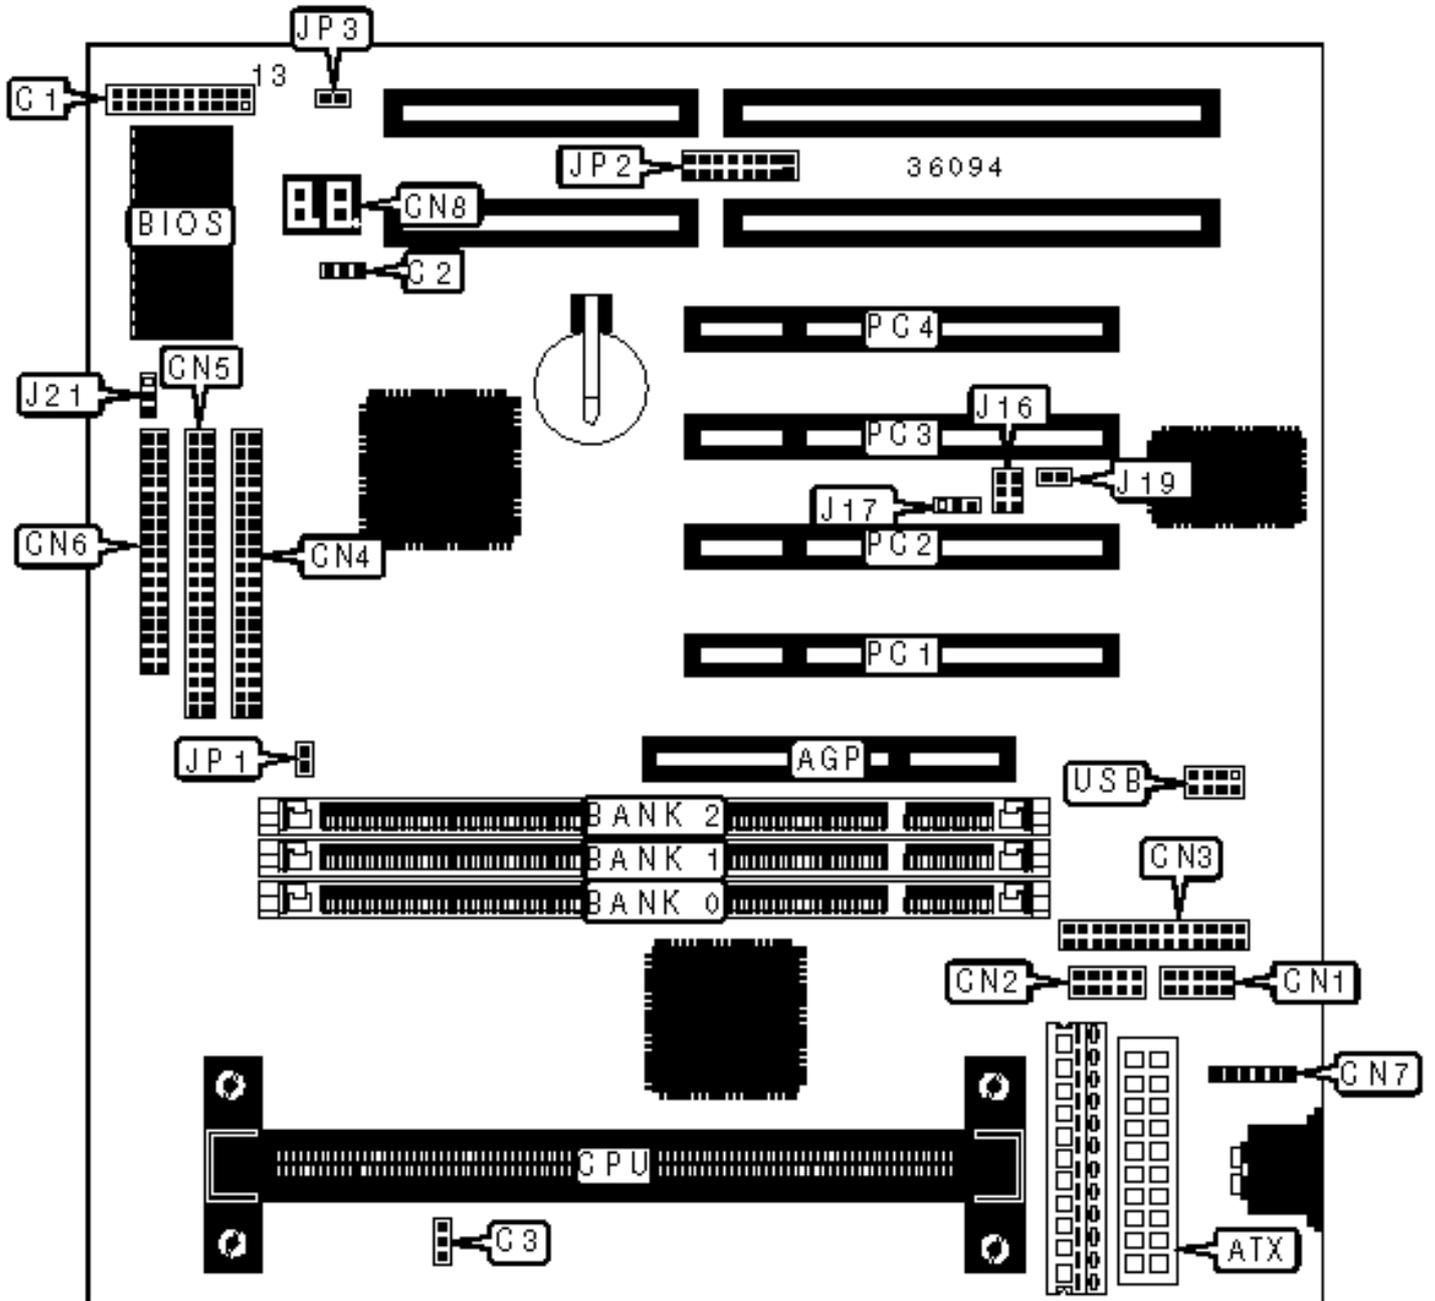

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Reset switch	C1/pins 11 & 12
ATX power connector	ATX	IR connector	C1/pins 13 - 16
Serial port 2	CN1	Speaker	C1/pins 17 - 20
Serial port 1	CN2	IDE interface LED	C1/pins 21 & 22
Parallel port	CN3	Soft off power supply	C1/pins 23 & 24
IDE interface 1	CN4	Chassis fan power	C2
IDE interface 2	CN5	CPU fan power	C3
Floppy drive interface	CN6	SB-link connector	J16
PS/2 mouse interface	CN7	Wake on LAN connector	J17
Debug display	CN8	Debug connector	JP2
IR connector	C1/pins 1 - 5	32-bit PCI slots	PC1 - PC4
Power LED & keylock	C1/pins 6 - 10	USB connector	USB

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Factory configured - do not alter	J19	Unidentified
» CMOS memory normal operation	J21	Pins 1 & 2 closed
CMOS memory clear	J21	Pins 2 & 3 closed
Debug display type select on board	JP3	Closed
Debug display type select external	JP3	Open

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None

16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64

112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None

320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
Note: Board accepts EDO & SDRAM memory.			

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP1
233MHz	66MHz	3.5x	Closed
266MHz	66MHz	4x	Closed
300MHz	66MHz	4.5x	Closed
333MHz	66MHz	5x	Closed
350MHz	100MHz	3.5x	Open
400MHz	100MHz	4x	Open
450MHz	100MHz	4.5x	Open
500MHz	100MHz	5x	Open

DEBUG DISPLAY SELECTION

Error code	Display	Message	Solution
------------	---------	---------	----------

C1	None	Can't detect DRAM	Replace/reinstall SDRAM
C1	None	Can't detect DRAM	Replace/reinstall BIOS
C6	None	Can't detect DRAM	Replace/reinstall SDRAM
C6	None	Can't detect DRAM	Replace/reinstall BIOS
OD	None	Can't detect VGA card	Replace/reinstall VGA card
OD	None	Can't detect VGA card	Replace/reinstall BIOS
4E	Yes	Can't detect floppy drive	Replace BIOS
4E	Yes	Can't detect floppy drive	Enter BIOS menu to reset
4E	Yes	Can't detect floppy drive	Check that floppy is connected
4E	Yes	Can't detect floppy drive	Reconnect/reinstall floppy cable
61	Yes	L2 cache problem	Enter BIOS menu to disable cache