Chapter 5: Jumper Settings
SVEC COMPUTER CORPORATION
F D 1 0 5 2

NIC Type	Ethernet
Transfer Rate	100Mbps
Data Bus	PCI
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available (location unidentified)
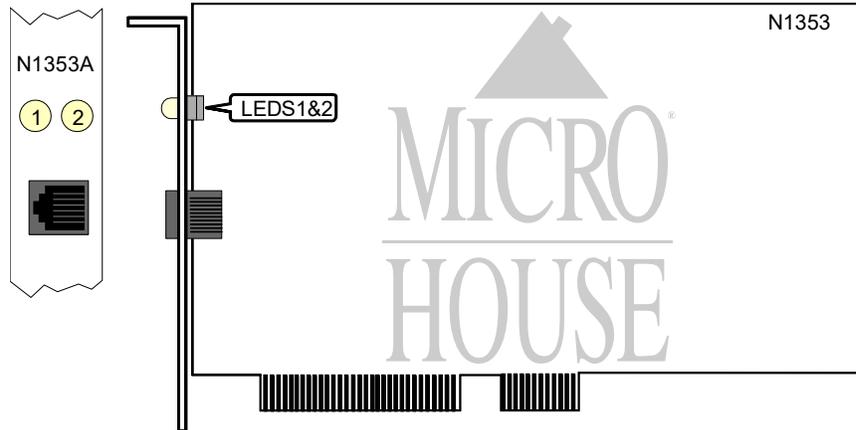
DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Network connection is good
LED1	Off	Network connection is broken
LED2	On	Data is being transmitted/received
LED2	Off	Data is not being transmitted/received