


UNIDENTIFIED

WL801M MINY AT-286

Configuration

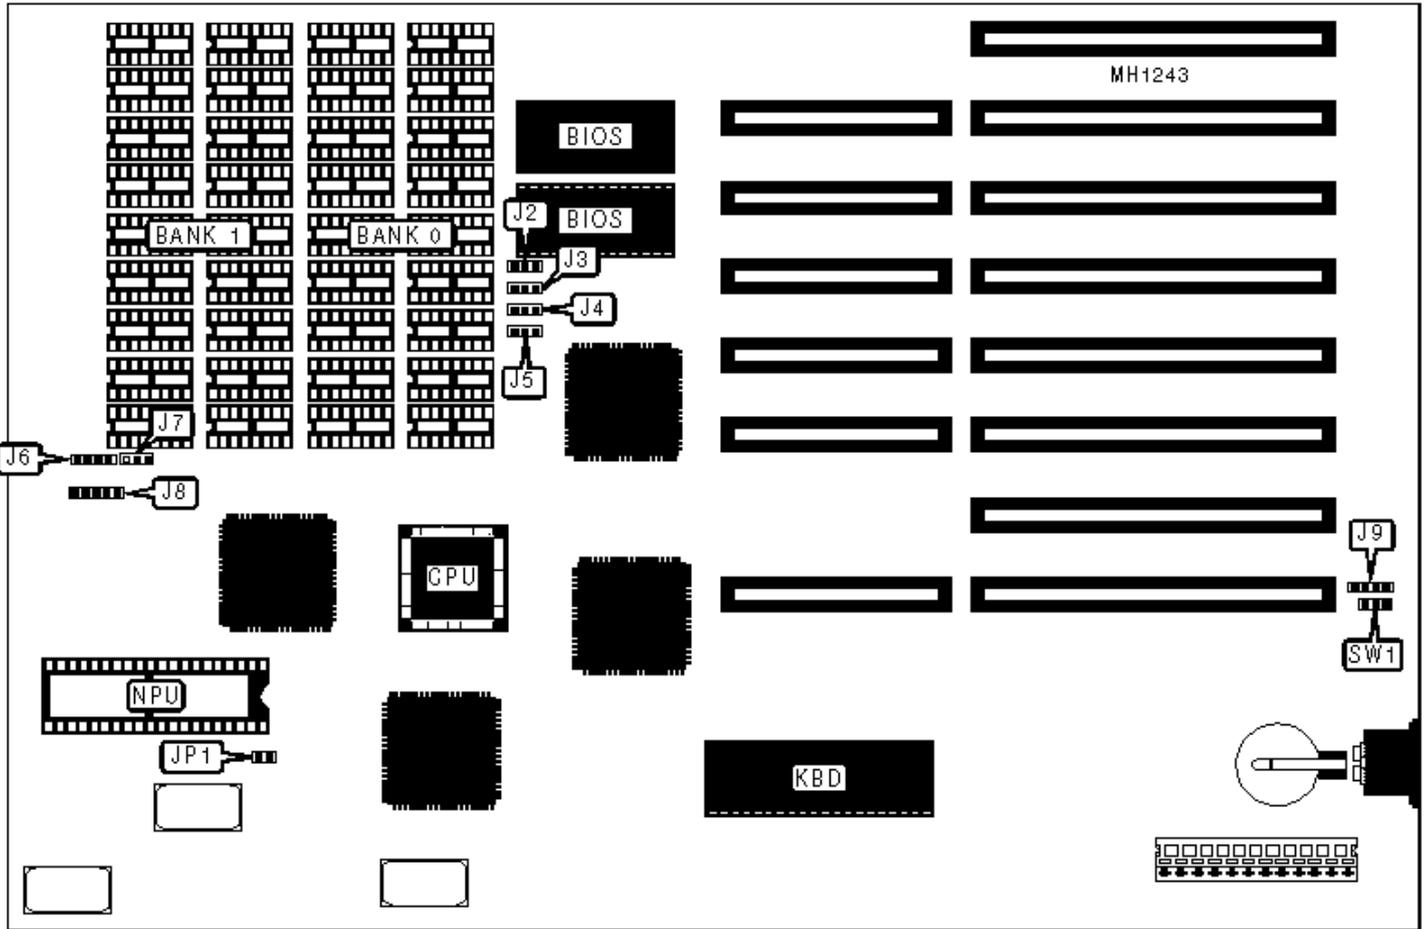

CONNECTIONS

| Purpose | Location | Purpose | Location |
|---------------------|---------------|------------------|----------|
| Turbo switch | J2 pins 2 & 3 | External battery | J9 |
| Speaker | J6 | Reset switch | JP1 |
| Power LED & keylock | J8 | | |

USER CONFIGURABLE SETTINGS

| Function | | Jumper | Position |
|----------|---|--------|----------------------|
| » | CPU speed select switchable from turbo switch | J2 | pins 2 & 3 connected |
| | CPU speed select switchable from keyboard | J2 | pins 1 & 2 closed |
| » | Factory configured - do not alter | J5 | unknown |
| » | I/O bus select 0 wait states | J7 | pins 2 & 3 closed |
| | I/O bus select 1 wait state | J7 | pins 1 & 2 closed |
| » | Monitor type select monochrome | SW1 | pins 1 & 2 closed |
| | Monitor type select color | SW1 | pins 2 & 3 closed |

DRAM CONFIGURATION

| Size | Bank 0 | Bank 1 | J3 | J4 |
|--------|------------|------------|-------------------|-------------------|
| 256KB | (18) 4164 | (18) 4164 | pins 2 & 3 closed | pins 2 & 3 closed |
| 512KB | (18) 41256 | NONE | pins 2 & 3 closed | pins 1 & 2 closed |
| 640KB | (18) 41256 | (18) 4164 | pins 1 & 2 closed | pins 2 & 3 closed |
| 1024KB | (18) 41256 | (18) 41256 | pins 1 & 2 closed | pins 1 & 2 closed |