Chapter 5: Jumper Settings
SVEC COMPUTER CORPORATION
F D 1 0 5 1

NIC Type   Ethernet
Transfer Rate   100Mbps
Data Bus   32-bit EISA
Topology   Star
Wiring Type   Unshielded twisted pair
Boot ROM   Available
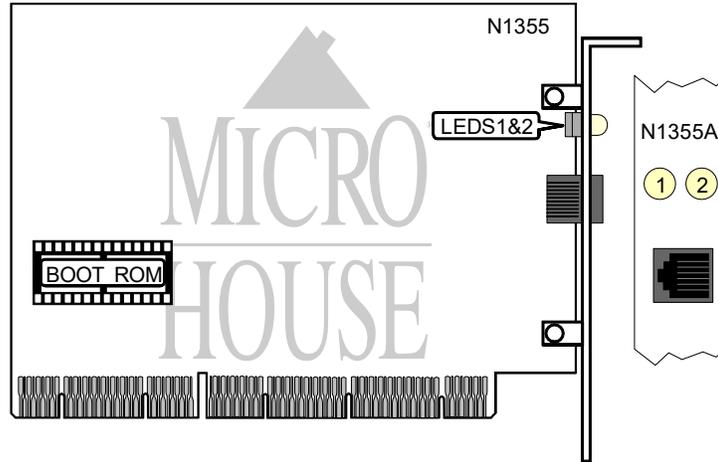
DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Data is being transmitted/received
LED1	Off	Data is not being transmitted/received
LED2	On	Network connection is good
LED2	Off	Network connection is broken