


# ACCTON TECHNOLOGY CORPORATION ETHERCOMBO-32 (EN1200R02)

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	32-bit EISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	Available

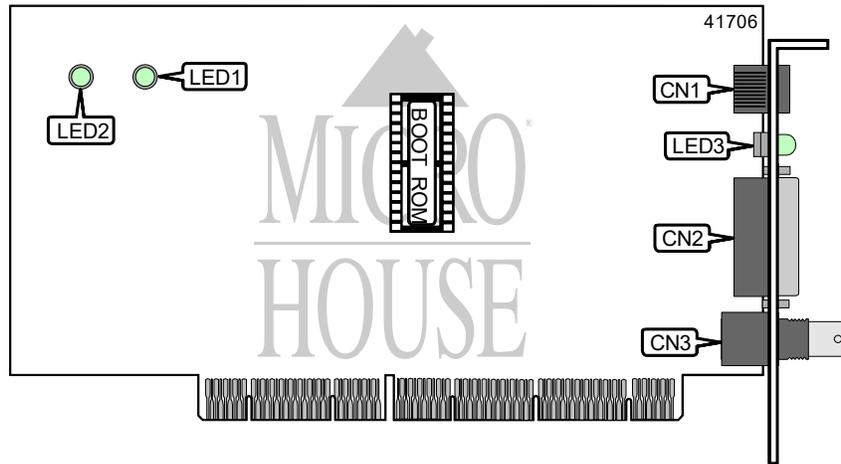

CONNECTIONS				
Function	Label	Function	Label	
Unshielded twisted pair port	CN1	RG-58A/U 50ohm coaxial port	CN3	
AUI transceiver via DB-15 port	CN2			

DIAGNOSTIC LED(S)				
LED	Color	Status	Condition	
LED1	Green	On	Data is being transmitted	
LED1	Green	Off	Data is not being transmitted	
LED2	Green	On	Data is being received	
LED2	Green	Off	Data is not being received	
LED3	Green	On	10Base-T network connection is good	
LED3	Green	Off	10Base-T network connection is broken	