


MICRODYNE CORPORATION EXOS 205T

NIC Type	Ethernet
Processor	Intel 80186
Processor Speed	8MHz
Chip Set	Intel 82586
Maximum Onboard Memory	512KB DRAM
Data Bus	8bit ISA
Network Transfer Rate	10Mbps
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
Boot ROM	AUI transceiver via DB-15 port Available (location unidentified)

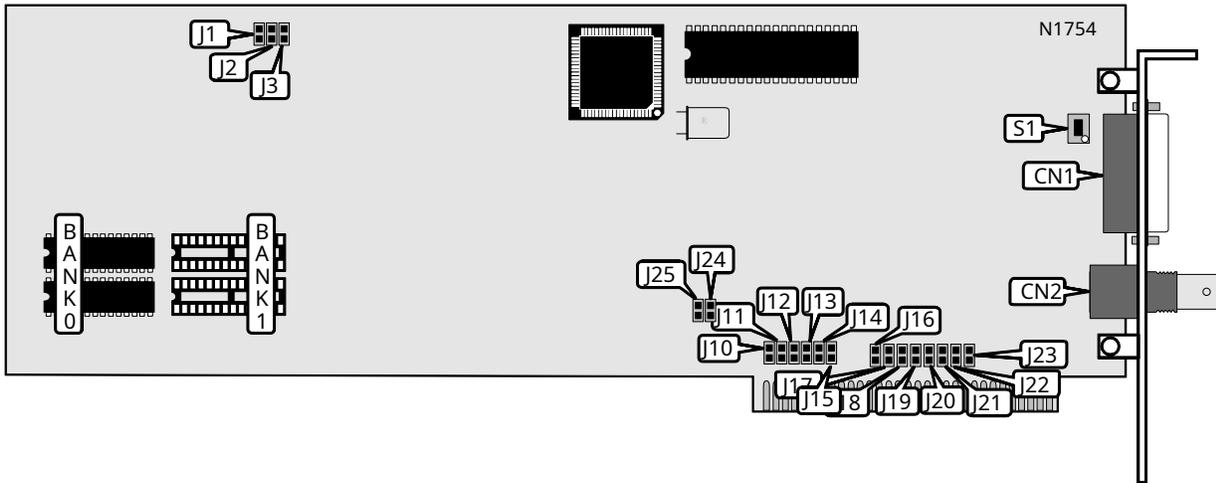

CONNECTIONS			
Function	Label	Function	Label
AUI transceiver via DB-15 port	CN1	RG-58A/U 50ohm coaxial connector	CN2

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í SQE heartbeat enabled	J2	Open
í SQE heartbeat disabled	J2	Closed
í Carrier detect enabled	J3	Open
í Carrier detect disabled	J3	Closed
í Auto-detect bus size	J33	Closed
í Force 8-bit bus size	J33	Open

CABLE TYPE	
Setting	S1
RG-58A/U 50ohm coaxial	On
AUI transceiver via DB-15 port	Off

Continued on next page . . .

MICRODYNE CORPORATION
EXOS 205T

. . . continued from previous page

BASE I/O ADDRESS		
Setting	J24	J25
300h	Closed	Closed
í 310h	Open	Closed
320h	Closed	Open
330h	Open	Open

BOOT ROM ADDRESS								
Setting	J16	J17	J18	J19	J20	J21	J22	J23
C0000h	Closed	Open						
C4000h	Open	Closed	Open	Open	Open	Open	Open	Open
C8000h	Open	Open	Closed	Open	Open	Open	Open	Open
CC000h	Open	Open	Open	Closed	Open	Open	Open	Open
D0000h	Open	Open	Open	Open	Closed	Open	Open	Open
D4000h	Open	Open	Open	Open	Open	Closed	Open	Open
D8000h	Open	Open	Open	Open	Open	Open	Closed	Open
DC000h	Open	Closed						
í Disabled	Open							

INTERRUPT						
Setting	J10	J11	J12	J13	J14	J15
í IRQ2/9	Closed	Open	Open	Open	Open	Open
IRQ3	Open	Closed	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open
IRQ6	Open	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Open	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
256KB	(2) 256K x 4	None
512KB	(2) 256K x 4	(2) 256K x 4

DRAM JUMPER	
Size	J1
256KB	Closed
512KB	Open

Continued on next page. . .