


# INTEL CORPORATION ETHEREXPRESS PRO 10+ ISA

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	-

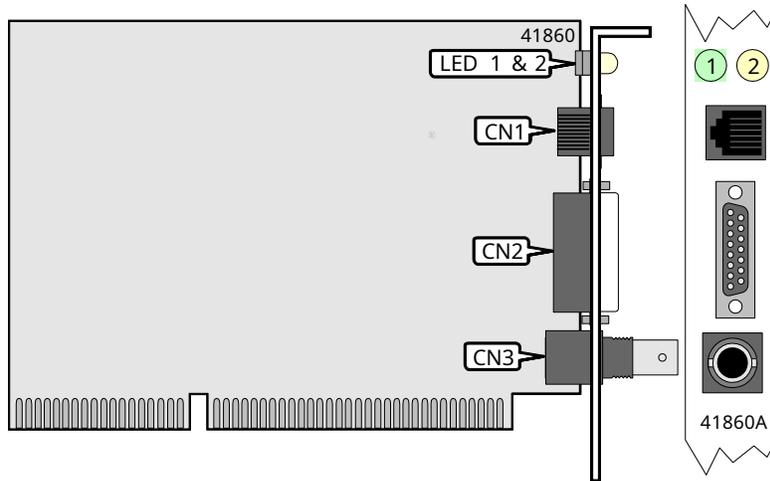

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair	CN1	RG-58A/U 50ohm coaxial	CN3
AUI transceiver via DB-15 port	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED 1	Green	Off	Data is not being transmitted or received
LED 1	Green	On	Data is being transmitted or received
LED 2	Yellow	Off	UTP link is broken
LED 2	Yellow	On	UTP link is good