


OVISLINK TECHNOLOGIES CORPORATION

LE-8029R (REV. 3.0)

NIC Type Ethernet
Boot ROM Available
Network Transfer Rate 10Mbps
Topology Linear Bus/Star
Wire Type Unshielded twisted pair
 RG-58A/U 50ohm coaxial
Data Bus 32-bit PCI
Card Size Half height, half length

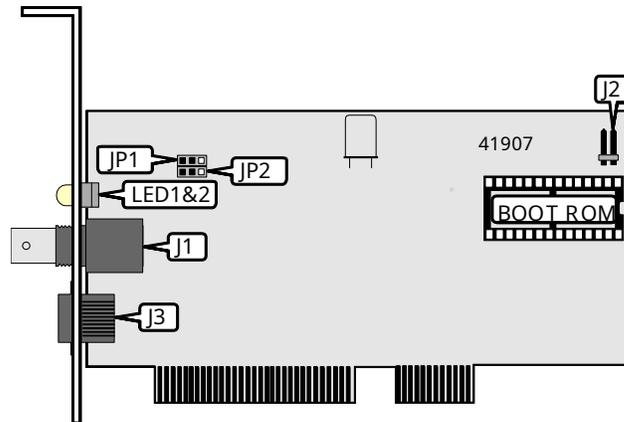

CONNECTIONS			
Function	Label	Function	Label
RG-58A/U 50ohm coaxial connector	J1	UTP connector	J3
External transmit/receive LED connector	J2		

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
Maximum coaxial cable length is 185 meters	JP1	Pins 2 & 3 closed	
Maximum coaxial cable length is 300 meters	JP1	Pins 1 & 2 closed	
Coaxial connector is not terminated	JP2	Pins 1 & 2 closed	
Coaxial connector is terminated	JP2	Pins 2 & 3 closed	

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
J2	N/A	Blinking	Card is transmitting or receiving data
J2	N/A	Off	Card is not transmitting or receiving data
LED1	Unidentified	Blinking	Card is transmitting or receiving data
LED1	Unidentified	Off	Card is not transmitting or receiving data
LED2	Unidentified	On	Network connection is good
LED2	Unidentified	Blinking	Network connection is intermittent
LED2	Unidentified	Off	Network connection is broken