


CD520 / CB52X-SI SERIES JUMPER MAP

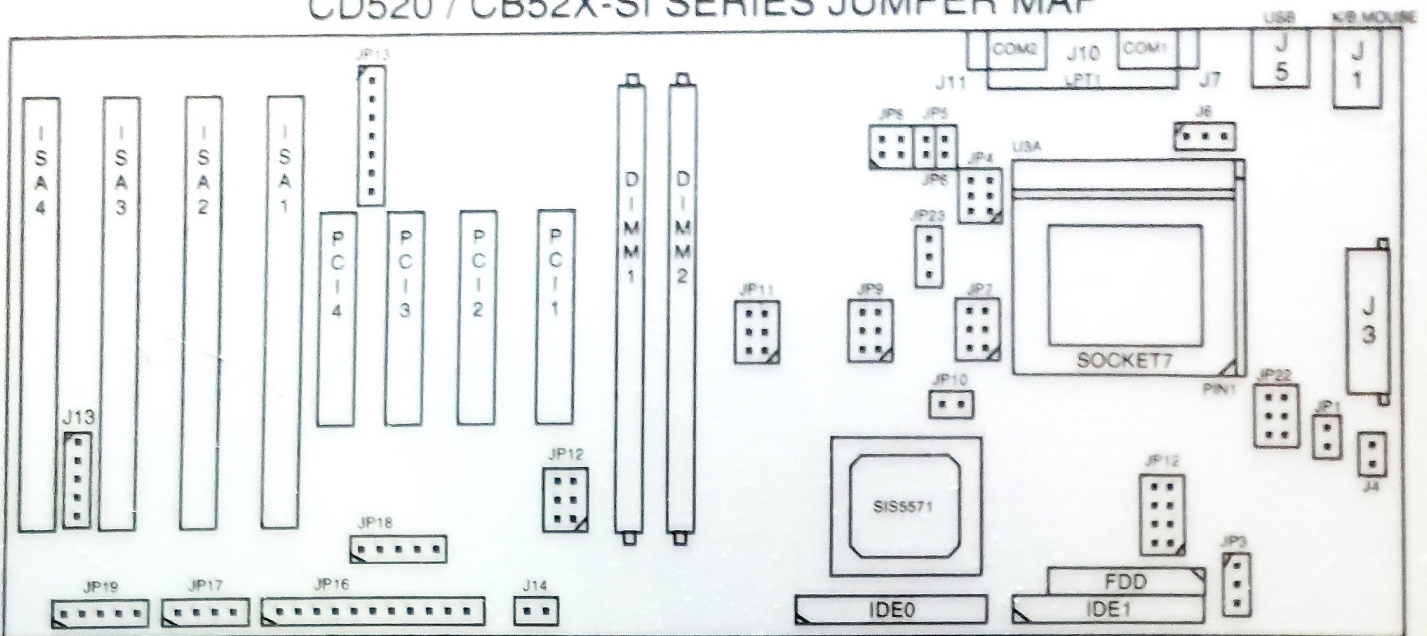

CONN	DESCRIPTIONS	CONN	DESCRIPTION
J1	MOUSE/KEYBOARD CONNECTOR	J13	RING&VOL UP/DN CONNECTOR
J3	ATX POWER CONNECTOR	JP1	POWER SWITCH CONNECTOR(CD520)
J4,J14	POWER S/W CONNECTOR(CB52X-SI)	JP13	IrDA CONNECTOR
J5	USB CONNECTOR	JP16	POWER/HDD LED CONNECTOR
J6	CPU FAN CONNECTOR	JP17	SPEAKER CONNECTOR
J7	SERIAL CONNECTOR (COM1)	JP18	IR/VOLUME BUTTON CONNECTOR
J10	PARALLEL CONNECTOR	JP19	KEYLOCK CONNECTOR
J11	SERIAL CONNECTOR (COM2)		

JUMPER	ITEM CPU	CPU FREQ (MHz)	CPU VOLTAGE SELECTION								CPU FREQ. SELECTION								CACHE		BF2		REMARK
			JP4	JP22	JP7	JP21				JP8		JP11			JP12			JP6	JP10	JP23			
			S0-S2		S0-S2	S1	S2	S3	S4	S0	S1	S0	S1	S2	S0	S1	S2			1-2	2-3		
Intel	Pentium-150	60	0	X	0	X	X	X	0	0	0	0	X	X	X	0	0	X	X	X	STD 3.3V		
	Pentium-166	66	0	X	0	X	X	X	0	0	0	X	X	X	X	0	X	X	X	X			
	Pentium-200	66	0	X	0	X	X	X	0	X	0	X	X	X	X	0	X	X	X	X			
	Pentium-150	60	0	0	X	0	0	0	0	0	0	0	X	X	X	X	0	0	X	X	VRE 3.52V		
	Pentium-166	66	0	0	X	0	0	0	0	0	0	X	X	X	X	0	X	X	X	X			
	Pentium-200	66	0	0	X	0	0	0	0	X	0	X	X	X	X	0	X	X	X	X			
	PP/MT-166	66	X	0	0	X	X	X	0	0	0	X	X	X	X	0	X	X	X	X	CORE 2.8V I/O 3.3V		
PP/MT-200	66	X	0	0	X	X	X	0	X	0	X	X	X	X	0	X	X	X	X				
PP/MT-233	66	X	0	0	X	X	X	0	X	X	X	X	X	X	0	X	X	X	X				
AMD	K5/PR150	60	0	0	X	0	0	0	0	0	0	0	X	X	X	0	0	X	X	X	3.52V		
	K5/PR166	66	0	0	X	0	0	0	0	0	0	X	X	X	X	0	X	X	X	X			
	K6/PR2-166	66	X	0	0	0	X	X	0	0	0	X	X	X	X	0	X	X	0	X			
	K6/PR2-200	66	X	0	0	0	X	X	0	X	0	X	X	X	X	0	X	X	0	X	CORE 2.9V CORE 2.9V CORE 3.2V CORE 2.1V CORE 2.1V CORE 2.1V I/O 3.3V		
	K6/PR2-233	66	X	0	0	X	X	0	X	X	X	X	X	X	X	0	X	X	0	X			
	K6/PR2-233	66	X	0	0	0	X	X	X	X	X	X	X	X	X	0	X	X	0	X			
	K6/PR2-266	66	X	0	0	0	X	X	X	0	X	X	X	X	X	0	X	X	X	0			
K6/PR2-300	66	X	0	0	0	X	X	X	0	0	X	X	X	X	0	X	X	X	0				
Cyrix IBM S/T	6x86L-P166+	66	X	0	0	X	X	X	0	0	X	X	X	X	X	0	X	0	0	X	X	CORE 2.8V I/O 3.3V	
	6x86L-P200+	75	X	0	0	X	X	X	0	0	X	X	X	X	X	0	X	0	0	X	X		
	6x86L-P166+	66	0	X	0	X	X	X	0	0	X	X	X	X	X	0	X	0	0	X	X		
	6x86L-P200+	75	0	X	0	X	X	X	0	0	X	X	X	X	X	0	X	0	0	X	X	CORE 3.3V I/O 3.3V	
	6x86 P166+	66	0	0	X	0	0	0	0	0	X	X	X	X	X	0	X	0	0	X	X		
	6x86 P200+	75	0	0	X	0	0	0	0	0	X	X	X	X	X	0	X	0	0	X	X		
	MX/PR166	60	X	0	0	0	X	X	0	0	0	0	X	X	X	X	0	0	X	0	X	X	3.52V
	MX/PR200	66	X	0	0	0	X	X	0	0	0	0	X	X	X	X	0	X	0	X	X	X	
	MX/PR200	75	X	0	0	0	X	X	0	0	X	X	X	X	X	0	X	0	X	0	X	X	
	MX/PR233	66	X	0	0	0	X	X	0	X	0	X	X	X	X	0	X	X	0	X	X	X	
	MX/PR233	75	X	0	0	0	X	X	0	0	0	X	X	X	X	0	X	0	X	0	X	X	
MX/PR266	66	X	0	0	0	X	X	0	X	X	X	X	X	X	0	X	0	X	0	X	X		
MX/PR266	75	X	0	0	0	X	X	0	X	0	X	X	X	X	0	X	0	X	0	X	X		