


COMPU-SHACK PRODUCTION, GMBH HIGHSCREEN (ISA)

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10/100Mbps
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA

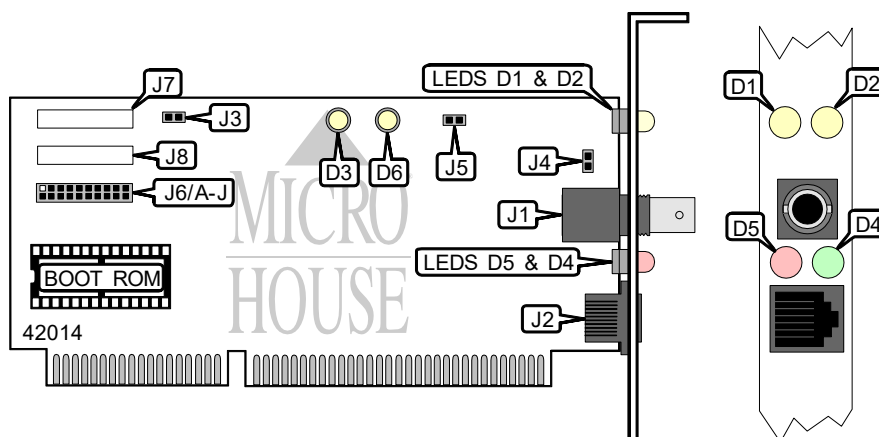

CONNECTIONS			
Function	Label	Function	Label
RG-58A/U connector	J1	UTP connector	J2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Adapter in AT slot (16-bit)	J3	Open	
Adapter in PC slot (8-bit)	J3	Closed	
No 50 ohm resistor connected	J4	Open	
50 ohm resistor connected	J4	Closed	
Factory configured - do not alter.	J6/B	Unidentified	
Factory configured - do not alter.	J6/C	Unidentified	
Factory configured - do not alter.	J6/D	Unidentified	
Factory configured - do not alter.	J6/E	Unidentified	
Factory configured - do not alter.	J6/F	Unidentified	
Factory configured - do not alter.	J6/G	Unidentified	
Factory configured - do not alter.	J6/H	Unidentified	
Factory configured - do not alter.	J6/I	Unidentified	
Factory configured - do not alter.	J6/J	Unidentified	
Factory configured - do not alter.	J7	Unidentified	
Factory configured - do not alter.	J8	Unidentified	

SOFTWARE CONFIGURATION SELECT		
Function	J5	J6/A
Software enabled	Closed	Closed
Software disabled	Open	Open

Continued on next page. . .

COMPU-SHACK PRODUCTION, GMBH HIGHSCREEN, HIGHSCREEN P&P (ISA)

. . . continued from previous page

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
D1	Yellow	Blinking	Data is being transmitted
D1	Yellow	Off	Data is not being transmitted
D2	Yellow	Blinking	Data is being received
D2	Yellow	Off	Data is not being received
D3	Yellow	On	Collision detected
D3	Yellow	Off	No collision detected
D4	Green	On	UTP link is good
D4	Green	Off	UTP link is broken
D5	Red	On	Polarity reversed
D5	Red	Off	Polarity normal
D6	Yellow	On	TP time-out elapsed/TP driver disabled
D6	Yellow	Off	TP time-out not elapsed/TP driver enabled